

PRODUCT CATALOGUE

2017

AUTOMATED SYSTEMS
FOR GARAGE AND
INDUSTRIAL DOORS

AUTOMATED SYSTEMS
FOR GATES

AUTOMATIC
BARRIERS

Automated
systems for gates,
garages,
industrial doors
and barriers



General Index

How to read the catalogue	6
Kits	8
Product families	14
Control boards	64
Accessories	76
General conditions of sale	88
Analytical index by code	90

Product Index



KITS

KITS	8
------	---



Automated systems for SWING GATES

G-Bat	16
Sirocco	18
Mistral	20
Compas	22
Trigon 02	24
Diablo	26
Roller	28



Automated systems for SLIDING GATES

Blizzard 230V	32
Blizzard 24V	34
Falcon M14 - M20	36




Automated systems for GARAGE DOORS Automated systems for ROLLING SHUTTERS

Euro Breeze 06	40
Zodiac	42
Shutter	44



Automated systems for INDUSTRIAL DOORS

Mercury	48
Trigon K	50



AUTOMATIC BARRIERS

Simple	54
Spin	57
Rainbow	60



From ideas to automated system

Genius is a FAAC Group brand which designs and manufactures client-focused automated systems.

The skill and experience of Genius, coupled with the cutting-edge technology structures of the industry-leading Group in which it plays a key role, tangibly set Genius apart from competitors, and allows it to offer **unrivalled quality of products** and services.

This is why
choosing **Genius** means ensuring
reliability and **safety**

- **Extensive range:** products for every application requirement with an **excellent quality/price ratio**.
- **Tests on all products:** all products are **100% tested and approved**.
- Products **which are easy to install**, thanks to technologies like **G-Way** (Bus technology), and **safe**, thanks to devices like the **virtual encoder**.
- **Comprehensive** technical, commercial and marketing support.
- Complimentary, multilevel technical **refresher courses**.
- A rapid and efficient **technical support Service**.
- **Complete support** in achieving conformity with European safety standards.

GENIUS SAFE GATE PROJECT

For a world of automation with total peace of mind.



GENIUS[®]

The **GENIUS SAFE GATE PROJECT** represents a new way of approaching the world of automated systems in compliance with the standards of the current European Directive on safety (MD 2006/42/EC).

The GENIUS SAFE GATE PROJECT programme suggests automated electromechanical systems (with 230VAC or 24VDC voltage), which, thanks to the use of advanced electronic control boards and devices such as the new PROcoder absolute encoder, allow users to build fully-compliant systems as well as updating existing systems, without the need to replace the automated devices.



How to read the catalogue

Name of the product

Family

Operating voltage

Technologies

G-Bat



Easy release of the automated system

The sturdy inner kinematic mechanism guarantees long life

use PROcoder to get maximum safety

MOTOR FOR SWING GATES

- Available versions: 230V and 24V
- The 24V model is standard equipped with ENV function (Virtual Encoder) – **PATENT**
- Leaves up to 3 m (230V and 24V) and 4 m (only 230V)
- G-WAY system in 24V version (with Brain 15 Control Board) or in 230 V version (with Brain 17 Control Board)
- **PRO-CODER** Safety System (with Brain 17 Control Board)
- Easy release through a user friendly lever
- Sturdy inner kinematic mechanism made of a bronze crown and steel worm-screw
- Opening and closing slow down available in both versions
- Possibility of adding a rod cover housing.

Code	Name	Version	Voltage	Leaf max. length	Use
6170026	G-Bat 300 RH	Non-reversible right	230V	3 m.	Residential
6170027	G-Bat 300 LH	Non-reversible left	230V	3 m.	Residential
6170030	G-Bat 400 RH	Non-reversible right	230V	4 m.	Residential
6170031	G-Bat 400 LH	Non-reversible left	230V	4 m.	Residential
6170038	G-Bat 324 ENV RH	Non-reversible right	24V	3 m.	Residential
6170039	G-Bat 324 ENV LH	Non-reversible left	24V	3 m.	Residential

OPERATOR DIMENSIONS

107 mm
165 / 200 mm
640 / 735 mm

Technical Specifications	G-Bat 300	G-Bat 400	G-Bat 324 ENV
Power supply (V)	230		24
Nominal power (W)	280		35
Current (A)	1.2		-
Thermal Protection (°C)	140		-
Thrust capacitor (µF)	8		-
Thrust (daN)	350		150
Travel (mm)	300	400	300
Max. speed (cm/sec.) ¹	1.6		2.1
Frequency of use at 20 °C	S3 - 30%		Continuous
Operating ambient temperature (°C)		-20 +55	
Protection class		IP54	
Weight (kg)	6.5	7	7.5

1 - The max. rod exit speed can change according to the weight and friction of the gate.
Over 2.5 m, an electric lock is essential to ensure leaf blocking.

CONTROL BOARDS

Brain 17	Page 68
Brain 592	Page 68
Brain 15	Page 69

Product photos with a brief description

Table of models

The different colours denote the different operating voltages

Product dimensions

Table comparing the technical features of the models

Combined electronic devices

THE TECHNOLOGIES

ENV PATENT Virtual Nominal Encoder – **PATENT**. Fitted on 24V motors, this consists of an electronic circuit that detects the exact gate position, making it possible to manage the deceleration of the gate leaf and the obstacle detection with extremely high precision. Motors with this feature (ENV) can only be managed via the BRAIN 15 (swing-leaf gates) or the SPRINT 11 (sliding gates) control boards.

G-WAY BUS Exclusive BUS connection for photocells and/or absolute encoder (**PROcoder**). It makes electrical connections easier as it only requires two wires and allows the application of up to 16 pairs of photocells (VEGA BUS), which can only be addressed using built-in dip-switches on the photocell. Only present on BRAIN 15 (24V) and BRAIN 17 (230V) control boards.

6

KEY

- 

Automated systems for
SWING GATES
- 

Automated systems for
SLIDING GATES
- 

Automated systems for
**GARAGE DOORS and
ROLLING SHUTTERS**
- 

Automated systems for
INDUSTRIAL DOORS
- 

AUTOMATIC BARRIERS

Voltage

- 

230 V
- 

24 V

Technologies

- G-WAY**

BUS
- ENV**

PATENT


Table of typical installation

Photos of accessories with
brief description

Installation diagram for the product

Indicator colour for the family

ELECTRIC WIRING DIAGRAM

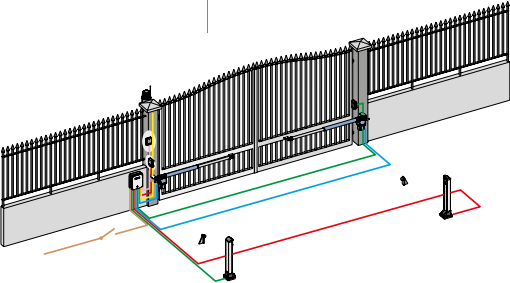

- Line 3x1,5 mm²
- Motor* 4x1,5 mm²
- Flashing lamp 2x1,5 mm²
- Selector 2x0,5 mm²
- TX photocells 2x0,5 mm²
- RX photocells 4x0,5 mm²

* For 24Vdc motors, use 2x2,5 mm² cables - max. distance between motor and control unit 10 m, provide a cable for encoder of 3x0,5 mm²

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
1	G-BAT 300 Motor RH	6170026
1	G-BAT 300 Motor LH	6170027
1	Electronic Control Board BRAIN 592	JA592
1	RC 433 one-channel receiver	6100110
1	Electronic Control Board Enclosure	JA320
1	Four-Channel Transmitter ECHO TX4 RC	6100334
1	230V GUARD Flashing Lamp	6100052
1	VEGA Photocells	6100147
1	QUICK 1 key-operated selector for outdoor use	JA31101-15

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Material description	Part number
1	Pair of ORION photocells	JA310
2	Column for photocell	JA325
2	Foundation plate for column	JA328

ACCESSORIES



PLATE
Kit of 6 fixing plates.
110x70x5 mm.

Code 58P0199



BRACKET
Kit of 6 front brackets h. 77 mm.

Code 58P0511



BRACKET
Kit of 6 rear brackets h. 160 mm.

Code 6100253



BRACKET
Kit of 6 rear brackets h. 130 mm.
NOT for 324 ENV

Code 6100043



BATTERY KIT
With recharging board.
Only for 24V models

Code 6100144



CARTER KIT
2 Red cover casing
For G-BAT 300 and 324 ENV

Code 6100254



PROcoder*

Code 6100324

*To be used with Brain 15 or Brain 17 electronic control boards.

PROcoder (BUS magnetic absolute encoder) - A geometric detection system for determining the exact position of the gate leaf.

PROcoder is a device that can be used with all swing-leaf automated systems, both 230V and 24V, even if already installed, without the need to change the size of the support brackets. It provides extremely high precision in gate leaf position reading (to 0.2°), and allows users to easily meet standard requirements in terms of anti-crushing safety. In the event of an electrical power cut, the deceleration and stop positions remain unchanged (ABSOLUTE system) for maximum user comfort.

It can be used with the BRAIN15 (for 24V swing-leaf gates) or BRAIN 17 (for 230V swing-leaf gates) boards.



KITS

Selection

GUIDE

Kits

Swing gates

G-Bat KitPage 10

Mistral KitPage 11

Compas KitPage 12

Sliding gates

Blizzard ENC Kit 500/900Page 13

G-Bat Kit



KIT FOR GATES WITH TWO SWING LEAVES

Kit complete with accessories (see list), suitable to automate a two-leaf gate (max. width of 3.00 m per leaf).

ACCESSORIES



CARTER KIT
2 Rod cover casing
For G-BAT 300 and 324 ENV

Code **6100254**

Individual components of the Kit:

51701271 G-Bat Kit - 433 MHz frequency - RC

Code	Name	Q.ty	Page
6170026	Electro-mechanical operator G-Bat 300 RH	1	16
6170027	Electro-mechanical operator G-Bat 300 LH	1	16
JA592	Brain 592 Electronic Control Board	1	68
JA320	Enclosure for Electronic Control Board	1	51
6100110	433 MHz Frequency Module	1	84
6100334	Four-channels transmitter ECHO TX4	1	86
6100147	Vega Photocells	1	78
JA31101	Quick 1 key-operated selector	1	82
6100052	Guard Flashing Lamp 230V	1	81
-	Warning Sign	1	-
-	Installation Accessories	2	-
-	Installation Instructions	1	-

Individual components of the Kit:

51701281 G-Bat Kit - 868 MHz frequency - JLC

Code	Name	Q.ty	Page
6170026	Electro-mechanical operator G-Bat 300 RH	1	16
6170027	Electro-mechanical operator G-Bat 300 LH	1	16
6100304	Brain 17 Electronic Control Board	1	68
JA320	Enclosure for Electronic Control Board	1	51
6100332	two-channels transmitter KILO TX2	1	84
6100147	Vega Photocells	1	78
JA31101	Quick 1 key-operated selector	1	82
6100052	Guard Flashing Lamp 230V	1	81
6100146	3 PINS Plug-in RQFZ Frequency Module 868 MHz	1	84
-	Warning Sign	1	-
-	Installation Accessories	2	-
-	Installation Instructions	1	-

Complete Kit:

Code	Model	Voltage	Leaf max. length	Pcs./Pallet
51701271	G-Bat Kit - 433 MHz frequency - RC	230V	3 m.	15
51701281	G-Bat Kit - 868 MHz frequency - JLC	230V	3 m.	15

Mistral Kit



KIT FOR GATES WITH TWO SWING LEAVES

Kit complete with accessories (see list), suitable to automate a two-leaf gate (max. width of 3.00 m per leaf).

Individual components of the Kit:

51700931 Mistral Kit - 868 MHz frequency - JLC

Code	Name	Q.ty	Page
6170116	Electro-mechanical operators Mistral 300	2	20
6100304	Brain 17 Electronic Control Board	1	68
JA320	Enclosure for Electronic Control Board	1	51
6100332	two-channels transmitter KILO TX2	1	84
6100147	Vega Photocells	1	78
JA31101	Quick 1 key-operated selector	1	82
6100052	Guard Flashing Lamp 230V	1	81
6100146	3 PINS Plug-in RQFZ Frequency Module 868 MHz	1	84
-	Warning Sign	1	-
-	Installation Accessories	2	-
-	Installation Instructions	1	-

Complete Kit:

Code	Model	Voltage	Leaf max. length	Pcs./Pallet
51700931	Mistral Kit - 868 MHz frequency - JLC	230V	3 m.	12

Compas Kit



G-WAY
BUS

ENV
PATENT



KIT FOR GATES WITH TWO SWING LEAVES

Kit complete with accessories (see list), for residential use, suitable to automate a two-leaf gate (max. length of 2.50 m and max. weight 310 kg per leaf).

Individual components of the Kit:

51700811 Compas Kit - 868 MHz frequency - JLC

Code	Name	Q.ty	Page
6170135	Electro-mechanical operator Compas 24	1	22
6170136	Electro-mechanical operator Compas 24 C (integrated electronic control board)	1	22
6100332	two-channels transmitter KIL0 TX2	1	84
6100148	BUS Vega Photocells	1	78
JA31101	Quick 1 key-operated selector	1	82
6100054	Guard Flashing Lamp 24V	1	81
6100146	3 PINS Plug-in RQFZ Frequency Module 868 MHz	1	84
-	Warning Sign	1	-
-	Installation Accessories	2	-
-	Installation Instructions	1	-

Complete Kit:

Code	Model	Voltage	Leaf max. length	Pcs./Pallet
51700811	Compas Kit - 868 MHz frequency - JLC	24V	2.50 m.	-

N.B. The transmission arm is included in the motor box. The maximum distance between the leaf hinge and the heart of the system must not exceed 220 mm.

Blizzard ENC Kit 500/900



integrated encoder



KIT FOR SLIDING GATES

Kit, complete with accessories (see list), suitable to automate a sliding gate with a max. weight of 500Kg and 900Kg.

Individual components of the Kit:

104001 BLIZZARD ENC KIT 500 868 MHz frequency - JLC

Code	Name	Q.ty	Page
61100821	Electro-mechanical operator Blizzard ENC 500 (with Sprint 382 control board and integrated encoder)	1	32
-	Foundation plate (included in the kit)	1	-
6100332	two-channels transmitter KIL0 TX2	1	84
6100147	Vega Photocells	1	78
JA31101	Quick 1 key-operated selector	1	82
6100052	Guard Flashing Lamp 230V	1	81
JA335	5-PIN one-channel receiver 868 MHz	1	84
-	Warning Sign	1	-
-	Installation Accessories	1	-
-	Installation Instructions	1	-

Individual components of the Kit:

104002 BLIZZARD ENC KIT 900 868 MHz frequency - JLC

Code	Name	Q.ty	Page
61100861	Electro-mechanical operator Blizzard ENC 900 (with Sprint 382 control board and integrated encoder)	1	32
-	Foundation plate (included in the kit)	1	-
6100332	two-channels transmitter KIL0 TX2	1	84
6100147	Vega Photocells	1	78
JA31101	Quick 1 key-operated selector	1	82
6100052	Guard Flashing Lamp 230V	1	81
JA335	5-PIN one-channel receiver 868 MHz	1	84
-	Warning Sign	1	-
-	Installation Accessories	1	-
-	Installation Instructions	1	-

Complete Kit:

Code	Model	Voltage	Leaf Weight	Pcs./Pallet
104001	Blizzard ENC kit 500 - 868 MHz frequency - JLC	230V	500 kg	39
104002	Blizzard ENC kit 900 - 868 MHz frequency - JLC	230V	900 kg	39



Automated systems for
SWING GATES

Selection

GUIDE

Swing gates

External

Leaf max. length 2.5 m.	
230V	
Sirocco 250	Page 18
24V	
Sirocco 2524	Page 18
Leaf max. length 3.0 m.	
230V	
G-Bat 300	Page 16
Mistral 300	Page 20
24V	
G-Bat 324 ENV	Page 16
Mistral T324 ENV	Page 20
Mistral 324	Page 20
Leaf max. length 4.0 m.	
230V	
G-Bat 400	Page 16
Mistral 400	Page 20
24V	
Mistral 424	Page 20

Articulated

Leaf max. length 2.5 m.	
24V	
Compas	Page 22
Leaf max. length 3.0 m.	
230V	
Trigon 02	Page 24

Underground

Leaf max. length 2.5 m.	
24V	
Diablo	Page 26
Leaf max. length 3.5 m.	
230V	
Roller	Page 28

Easy release of the automated system

use PROcoder to get maximum safety



The sturdy inner kinematic mechanism guarantees long life

MOTOR FOR SWING GATES

- Available versions: 230V and 24V
- The 24V model is standard equipped with ENV function (Virtual Encoder) - **PATENT**
- Leaves up to 3 m (230V and 24V) and 4 m (only 230V)
- G-WAY system in 24V version (with Brain 15 Control Board) or in 230 V version (with Brain 17 Control Board)
- **PRO-CODER** Safety System (with Brain 17 Control Board)
- Easy release through a user friendly lever
- Sturdy inner kinematic mechanism made of a bronze crown and steel worm-screw
- Opening and closing slow down available in both versions
- Possibility of adding a rod cover housing.

Code	Name	Version	Voltage	Leaf max. length	Use
6170026	G-Bat 300 RH	Non-reversible right	230V	3 m.	Residential
6170027	G-Bat 300 LH	Non-reversible left	230V	3 m.	Residential
6170030	G-Bat 400 RH	Non-reversible right	230V	4 m.	Residential
6170031	G-Bat 400 LH	Non-reversible left	230V	4 m.	Residential
6170038	G-Bat 324 ENV RH	Non-reversible right	24V	3 m.	Residential
6170039	G-Bat 324 ENV LH	Non-reversible left	24V	3 m.	Residential

OPERATOR DIMENSIONS




Technical Specifications	G-Bat 300	G-Bat 400	G-Bat 324 ENV
Power supply (V)	230		24
Nominal power (W)	280		35
Current (A)	1.2		-
Thermal Protection (°C)	140		-
Thrust capacitor (µF)	8		-
Thrust (daN)	350		150
Travel (mm)	300	400	300
Max. speed (cm/sec.) ¹	1.6		2.1
Frequency of use at 20 °C	S3 - 30%		Continuous
Operating ambient temperature (°C)	-20 +55		
Protection class	IP54		
Weight (kg)	6.5	7	7.5

CONTROL BOARDS

Brain 17	Page 68
Brain 592	Page 68
Brain 15	Page 69

¹ - The max. rod exit speed can change according to the weight and friction of the gate.
Over 2.5 m, an electric lock is essential to ensure leaf blocking.

ELECTRIC WIRING DIAGRAM

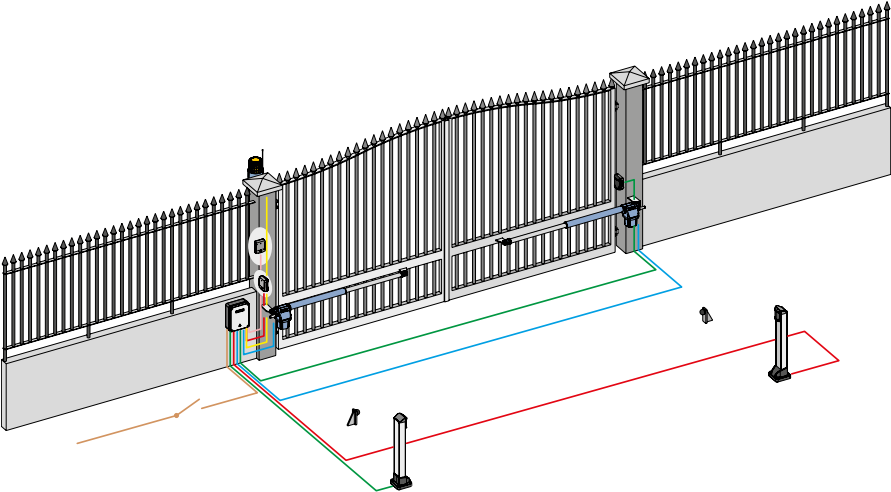

- Line3x1,5 mm²
- Motor*4x1,5 mm²
- Flashing lamp2x1,5 mm²
- Selector2x0,5 mm²
- TX photocells2x0,5 mm²
- RX photocells4x0,5 mm²

* For 24Vdc motors, use 2x2.5 mm² cables - max. distance between motor and control unit 10 m, provide a cable for encoder of 3x0.5 mm²

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
1	G-BAT 300 Motor RH	6170026
1	G-BAT 300 Motor LH	6170027
1	Electronic Control Board BRAIN 592	JA592
1	RC 433 one-channel receiver	6100110
1	Electronic Control Board Enclosure	JA320
1	Four-Channel Transmitter ECHO TX4 RC	6100334
1	230V GUARD Flashing Lamp	6100052
1	VEGA Photocells	6100147
1	QUICK 1 key-operated selector for outdoor use	JA31101-15

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Material description	Part number
1	Pair of ORION photocells	JA310
2	Column for photocell	JA325
2	Foundation plate for column	JA328

ACCESSORIES



PLATE
Kit of 6 fixing plates.
110x70x5 mm.

Code 58P0199



BRACKET
Kit of 6 front brackets h. 77 mm.

Code 58P0511



BRACKET
Kit of 6 rear brackets h. 160 mm.

Code 6100253



BRACKET
Kit of 6 rear brackets h. 130 mm.
NOT for 324 ENV

Code 6100043



BATTERY KIT
With recharging board.
Only for 24V models

Code 6100144



CARTER KIT
2 Rod cover casing
For G-BAT 300 and 324 ENV

Code 6100254



PROcoder*

Code 6100324

*To be used with Brain 15 or Brain 17 electronic control boards.

use PROcoder to get maximum safety



MOTOR FOR SWING GATES

- Float bracket (out of axis thrust)
- Available versions: 230V and 24V
- Leaves up to 2.5 m
- G-WAY system in 24V version (with Brain 15 Control Board) in 230 V version (with Brain 17 Control Board)
- **PROcoder** Safety System (with Brain 17 Control Board)
- Release through a user friendly accessory lever and customised key
- Sturdy inner kinematic mechanism made of a bronze crown and steel worm-screw
- Opening and closing slow down available in both versions
- Horizontal output cables (installation closed to floor)
- Double painting layer
- Integrated mechanical stops.

Code	Name	Version	Voltage	Leaf max. length	Use
6170124	Sirocco 250	Non-reversible	230V	2.5 m.	Residential / condominium
6170126	Sirocco 2524	Non-reversible	24V	2.5 m.	Residential / condominium

OPERATOR DIMENSIONS



Technical Specifications	Sirocco 250	Sirocco 2524
Power supply (V)	230	24
Nominal power (W)	250	70
Current (A)	1.1	3
Thermal Protection (°C)	140	-
Thrust capacitor (µF)	6.3	-
Thrust (daN)	200	250
Travel (mm)	300 (350 mm without mechanical stops)	
Max. speed (cm/sec)	1.6	
Frequency of use at 20 °C	S3 - 30%	continuous
Operating ambient temperature (°C)	-20 +55	
Protection class	IP54	
Weight (kg)	6,5	


CONTROL BOARDS

Brain 17	Page 68
Brain 592	Page 68
Brain 15	Page 69

N.B.

Over 1.80 m, an electric lock is essential to ensure leaf blocking.

ELECTRIC WIRING DIAGRAM

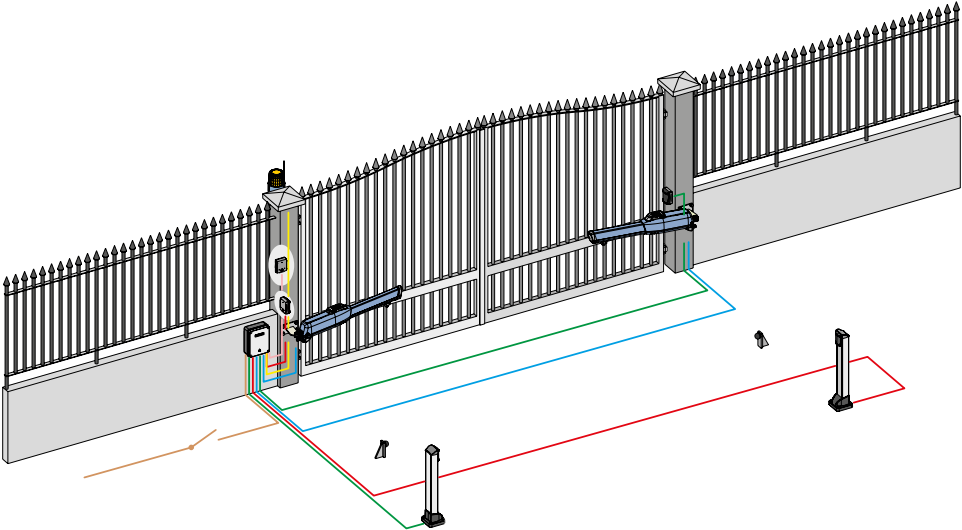

- Line3x1,5 mm²
- Motor*.4x1,5 mm²
- Flashing lamp2x1,5 mm²
- Selector2x0,5 mm²
- TX photocells2x0,5 mm²
- RX photocells4x0,5 mm²

* For 24Vdc motors, use 2x2.5 mm² cables - max. distance between motor and control unit 10m, provide a cable for encoder of 3x0.5 mm²

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
2	250 SIROCCO Motors	6170124
1	Electronic Control Board BRAIN 592	JA592
1	RC 433 one-channel receiver	6100110
1	Electronic Control Board Enclosure	JA320
1	Four-Channel Transmitter ECHO TX4 RC	6100334
1	230V GUARD Flashing Lamp	6100052
1	VEGA Photocells	6100147
1	QUICK 1 key-operated selector for outdoor use	JA31101-15

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Material description	Part number
1	Pair of ORION photocells	JA310
2	Column for photocell	JA325
2	Foundation plate for column	JA328

ACCESSORIES



PLATE
Kit of 6 fixing plates.
110x70x5 mm.

Code 58P0199



BRACKET
Kit of 6 rear brackets h. 160 mm.

Code 6100253



PROcoder*

Code 6100324



BATTERY KIT
With recharging board.
Only for 24V models

Code 6100144

*To be used with Brain 15 or Brain 17 electronic control boards.

use PROcoder to get maximum safety




MOTOR FOR SWING GATES

- Available versions: 230V and 24V
- Leaves up to 4 m
- The 24V model is standard equipped with ENV function (Virtual Encoder) - **PATENTED**
- G-WAY system in 24V version (with Brain 15 Control Board) or in 230 V version (with Brain 17 Control Board)
- **PROcoder** safety system (with Brain 15 AND Brain 17 Control Board)
- Release through a user friendly accessory lever and customised key
- Sturdy inner kinematic mechanism made of a bronze crown and steel worm-screw
- Opening and closing slow down available in both versions
- Electric limit switches version (no need of opening and closing slow down)
- Horizontal output cables (installation closed to floor)
- Double painting layer.

Code	Name	Version	Voltage	Leaf max. length	Use
6170116	Mistral 300	Non-reversible	230V	3 m.	Condominium
6170117	Mistral 300 LS	Non-reversible / limit-switches	230V	3 m.	Condominium
6170120	Mistral 400	Non-reversible	230V	4 m.	Condominium
6170121	Mistral 400 LS	Non-reversible / limit-switches	230V	4 m.	Condominium
6170118	Mistral 324	Non-reversible	24V	3 m.	Condominium
6170178	Mistral T324 ENV	Non-reversible	24V	3 m.	Residential
6170122	Mistral 424	Non-reversible	24V	4 m.	Condominium

OPERATOR DIMENSIONS

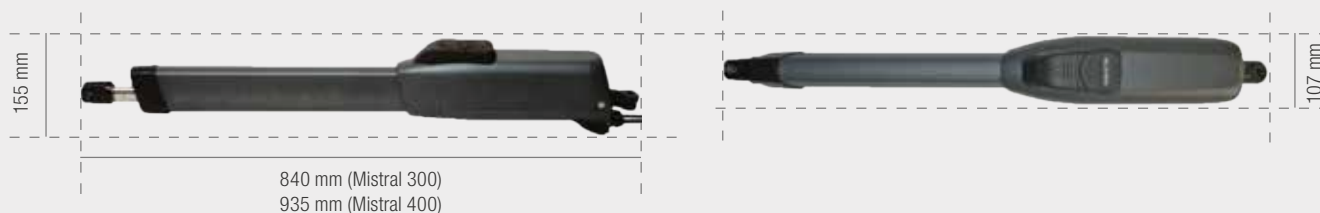


Technical Specifications	300	300 LS	400	400 LS	324	T324 ENV	424
Power supply (V)	230				24		
Nominal power (W)	300				70	35	70
Current (A)	1.3				3		
Thermal Protection (°C)	140				-		
Thrust capacitor (µF)	8	8	8	8	-		
Thrust (daN)	300	300	300	300	280	150	280
Travel (mm)	300		400		300		400
Max. speed (cm/sec)	1.6					2.1	1.6
Frequency of use at 20 °C	S3 - 30%	S3 - 35%	S3 - 30%	S3 - 35%	continuous		
Operating ambient temperature (°C)	-20 +55	-20 +55		-20 +55			
Protection class	IP54						
Weight (kg)	7.8		8		7.8	7.5	8

N.B.

Over 2.5 m, an electric lock is essential to ensure leaf blocking.

In 400 models, with leaves over 3 m, an electric lock is essential to ensure leaf blocking.

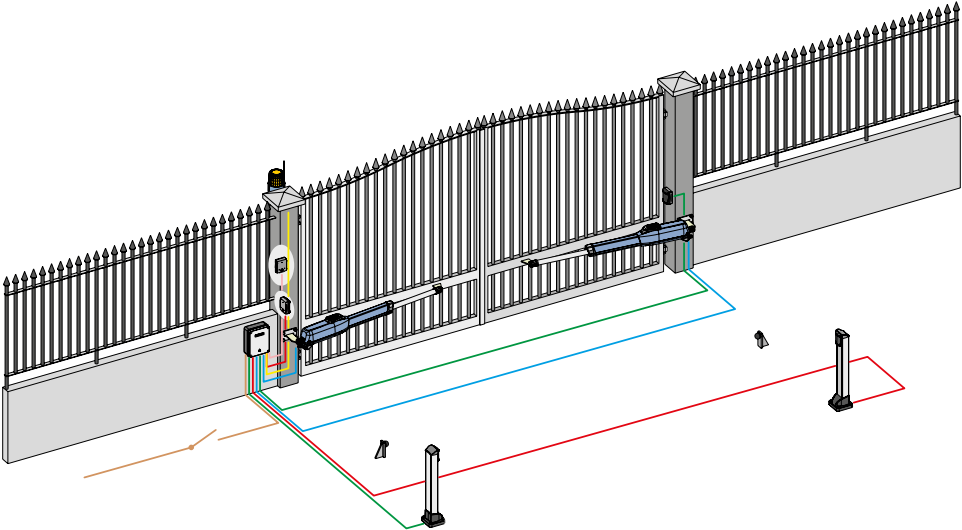

- Line3x1,5 mm²
- Motor*.4x1,5 mm²
- Flashing lamp2x1,5 mm²
- Selector2x0,5 mm²
- TX photocells2x0,5 mm²
- RX photocells4x0,5 mm²

* For 24Vdc motors, use 2x2.5 mm² cables - max. distance between motor and control unit 10m, provide a cable for encoder of 3x0.5 mm²

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
2	MISTRAL 300 Motors	6170116
1	Electronic Control Board BRAIN 592	JA592
1	RC 433 one-channel receiver	6100110
1	Electronic Control Board Enclosure	JA320
1	Four-Channel Transmitter ECHO TX4 RC	6100334
1	230V GUARD Flashing Lamp	6100052
1	VEGA Photocells	6100147
1	QUICK 1 key-operated selector for outdoor use	JA31101-15

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Material description	Code
1	Pair of ORION photocells	JA310
2	Column for photocell	JA325
2	Foundation plate for column	JA328

ACCESSORIES



PLATE
Kit of 6 fixing plates.
110x70x5 mm.

Code 58P0199



BRACKET
Kit of 6 front brackets h. 77 mm.

Code 58P0511



BRACKET
Kit of 6 rear brackets h. 160 mm.

Code 6100253



PROcoder*

Code 6100324



BATTERY KIT
With recharging board.
Only for 24V models

Code 6100144

CONTROL BOARDS

Brain 17	Page 68
Brain 592	Page 68
Brain 15	Page 69

*To be used with Brain 15 or Brain 17 electronic control boards.




MOTOR WITH ARTICULATED ARM FOR SWING GATES

- Available version: 24V
- Leaves up to 2.5 m
- Equipped with ENV function (Virtual Nominal Encoder)
- G-WAY system (with Brain 06 Control Board)
- Rotary release system and access with customised key
- Sturdy inner kinematic mechanism made of a bronze crown and steel worm-screw
- Integrated adjustable mechanical limit switches
- It allows installation on large pillars.

Code	Name	Version	Voltage	Leaf max. length	Use
6170135	Compas 24	Non-reversible	24V	2.5 m.	Residential
6170136	Compas 24 C	Non-reversible with control board Brain 06	24V	2.5 m.	Residential


OPERATOR DIMENSIONS

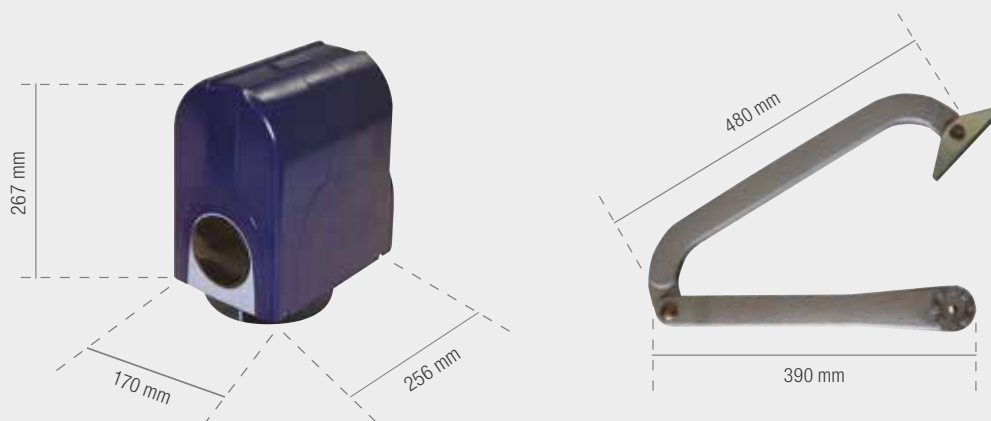

Technical Specifications	Compas 24	Compas 24 C
Power supply (V)	24	
Nominal power (W)	120	140
Max. torque (Nm)	250	
Angular speed (°/sec)	13	
Leaf max. weight (Kg) ¹	310	
Max. continuous cycles	30	
Frequency of use at 20 °C	continuous	
Operating ambient temperature (°C)	20 +55	
Protection class	IP44	
Weight (kg)	7	8,7

N.B.

1 - The max. weight of the leaf depends on length: max 200 Kg for 2.50 m; max. 310 Kg for 1.00 m.
Over 2 m, an electric lock is essential to ensure leaf blocking.

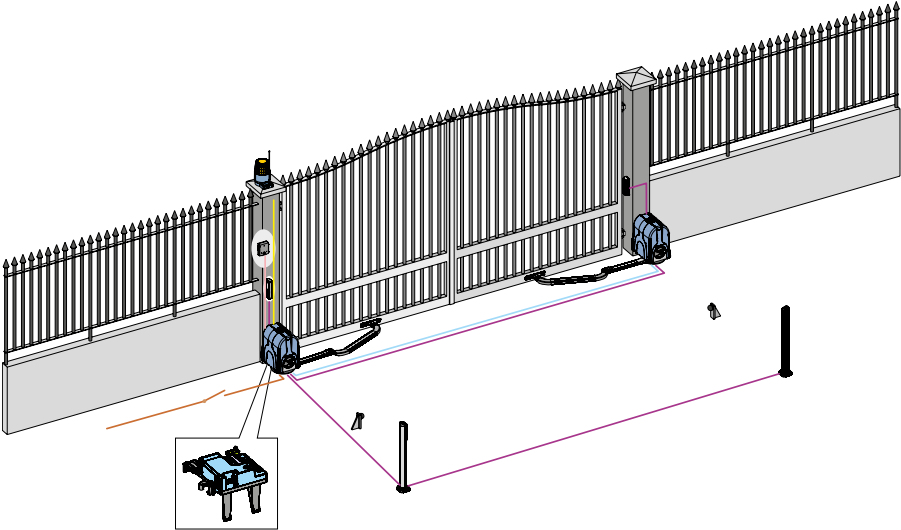

- Line3x1,5 mm²
- Motor*2x2,5 mm²
- Flashing lamp 2x1,5 mm²
- Selector2x0,5 mm²
- BUS connection2x0,5 mm²

* Max. distance between motor and control unit 10 m.

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
1	COMPAS 24 C Motor (including control board and articulated arm)	6170136
1	COMPAS 24 Motor (including articulated arm)	6170135
1	433 MHz Frequency Module	6100145
1	Four-Channel Transmitter ECHO TX4 RC	6100334
1	24V GUARD Flashing Lamp	6100054
1	Pair of VEGA BUS Photocells	6100148
1	QUICK 1 key-operated selector for outdoor use	JA31101-15

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Material description	Part number
1	Pair of VEGA BUS Photocells	6100148
2	Column for photocell	6100149
2	Foundation plate for column	6100150

ACCESSORIES



RADIOFREQUENCY
MODULE
RFQZ 3PIN for GENIUS.
433 MHz
Code 6100145



BATTERY KIT
With recharging board.
Code 6100144



ARMO 24V
With release device and control
push button.
Code 6100221



LOCK
Cylindrical lock for ARMO no.
1-10
Code 610025701-10



RELEASE KIT
Suitable with the ARMO container
Code 6100228

CONTROL BOARDS
Brain 15 Page 69

868 MHz

Code 6100146

Trigon 02



G-WAY
BUS

ENV
PATENT




MOTOR FOR SWING GATES

- Leaves up to 3 m
- Release with customised key
- Sturdy inner kinematic mechanism made of a bronze crown and steel worm-screw
- G-WAY system (with Brain 17 and Brain 15 control boards)
- Transmission arm designed to prevent shearing
- Available versions 230V and 24V
- Opening and closing slow down available in both versions
- It allows installation on large pillars.

Code	Name	Version	Voltage	Leaf max. length	Use
6170150	Trigon 02	Non-reversible (arm included)	230V	3 m.	Residential
6170151	Trigon 02-24	Not-reversible (arm included)	24V	3 m.	Residential

OPERATOR DIMENSIONS

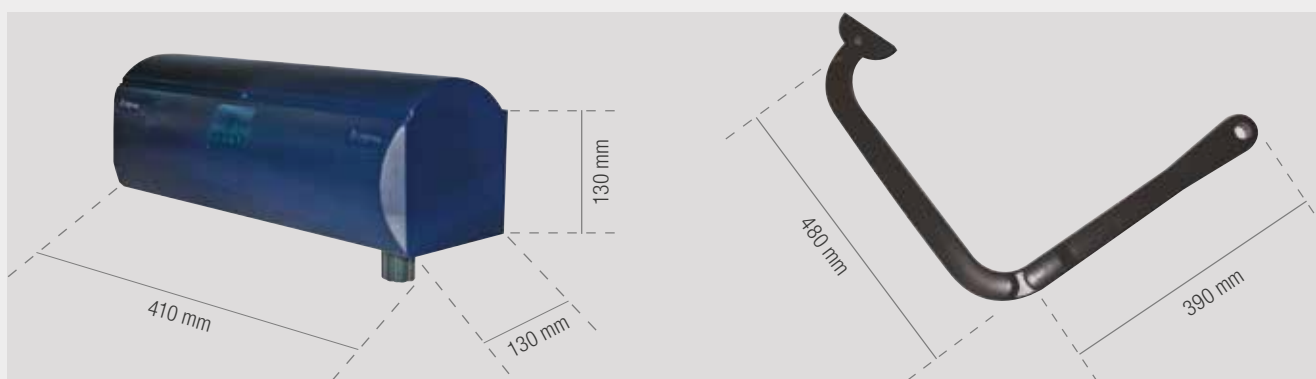


Technical Specifications	Trigon 02	Trigon 02 - 24
Power supply (V)	230	24
Nominal power (W)	280	40
Current (A)	1.2	2
Thermal Protection (°C)	140	-
Capacitor (µF)	8	-
Max. torque (Nm)	250	200
Angular speed (°/sec)	8	
Leaf opening time at 90° (sec.) ¹	18	
Frequency of use at 20 °C	S3 - 30%	continuous
Operating ambient temperature (°C)	-20 +55	
Protection class	IP44	
Weight (kg)	11.5	

CONTROL BOARDS

Brain 17	Page 68
Brain 592	Page 68
Brain 15	Page 69

N.B.

¹ - Opening time and max. leaf dimensions calculated for correctly executed installations at the dimensions indicated in the installation instructions and without slow-downs. Over 2 m, an electric lock is essential to ensure leaf blocking.

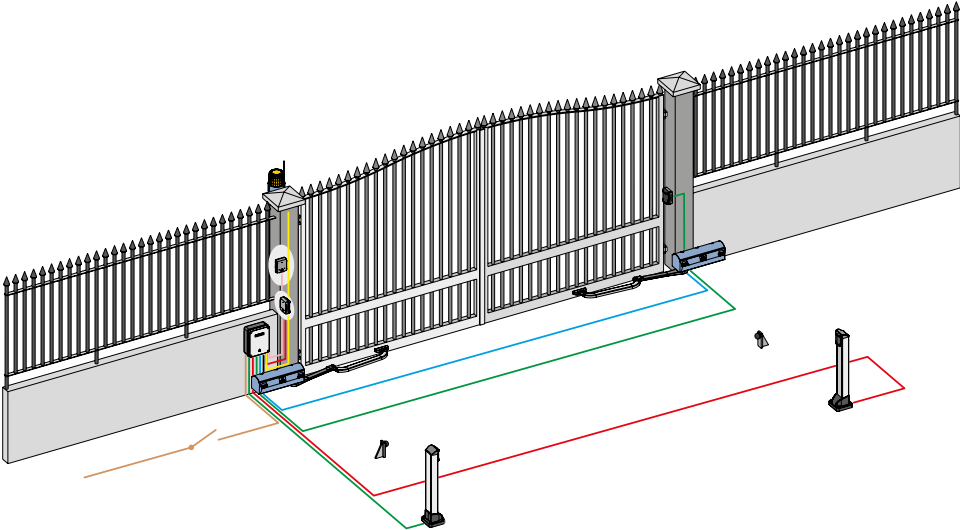

- Line3x1,5 mm²
- Motor*.4x1,5 mm²
- Flashing lamp2x1,5 mm²
- Selector2x0,5 mm²
- TX photocells2x0,5 mm²
- RX photocells4x0,5 mm²

* For 24Vdc motors, use 2x2.5 mm2 cables - max. distance between motor and control unit 10 m.

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
2	TRIGON 02 Motors	6170150
1	Electronic Control Board BRAIN 17	6100304
1	Electronic Control Board Enclosure	JA320
1	RQFZ 868 MHz Frequency Module	6100146
1	Four-Channel Transmitter KILO TX2 JLC	6100332
1	230V GUARD Flashing Lamp	6100052
1	VEGA Photocells	6100147
1	QUICK 1 key-operated selector for outdoor use	JA31101-15

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Material description	Part number
1	Pair of ORION photocells	JA310
2	Column for photocell	JA325
2	Foundation plate for column	JA328

ACCESSORIES



LIMIT SWITCH
For motor closing or opening limit stop.

Code 58P0653



ARMO 24V
With release device and control push button.

Code 6100221



LOCK
Cylindrical lock for ARMO no. 1-10

Code 610025701-10



BATTERY KIT
With recharging board.
Only for 24V models

Code 6100144




Underground motor for swing gates

- Fully hidden and extremely compact non-reversible gearmotor.
- Single version for openings up to 180°, as standard.
- Designed to operate leaves with max. weight of 250 kg and up to 2.5 width.
- Absolute encoder (optional) which detects leaf position and ensures maximum anti-crushing safety.
- Virtual patented Encoder system via BUS G-WAY bus (with Brain 15 control board).
- Adjustable mechanical stops (optional).

Code	Name	Version	Voltage	Leaf max. length	Use
6170082	Diablo	Non-reversible	24V	2.5 m.	Residential

OPERATOR DIMENSIONS

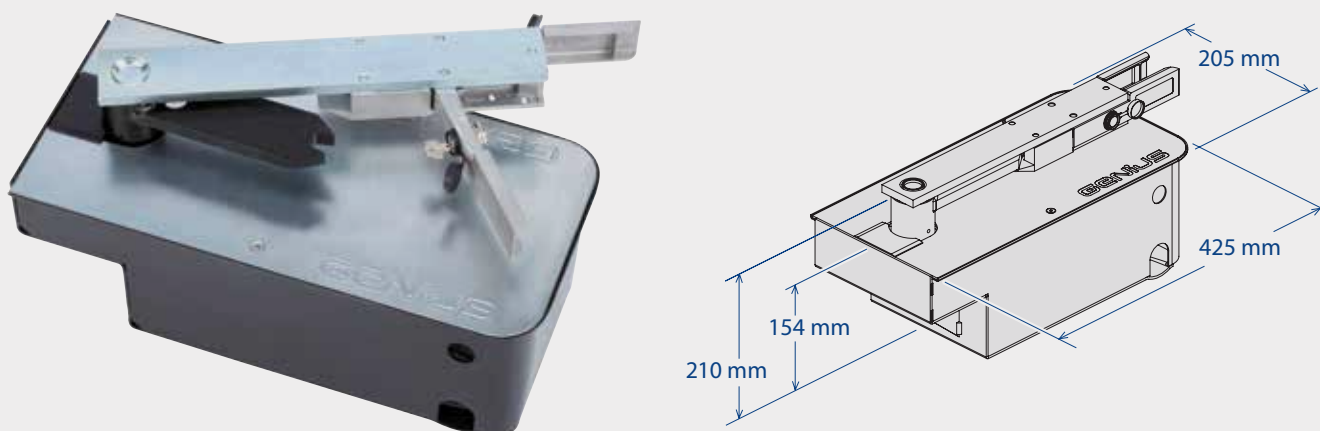

Technical Specifications	Diablo
Power supply (V)	24
Nominal power (W)	140
Max. torque (Nm)	200
Rated torque (Nm)	130
Angular speed (°/sec)	6
Frequency of use at 20 °C	continuous
Operating ambient temperature (°C)	-20 +55
Protection class	IP67
Weight (kg)	6.5

CONTROL BOARDS


Brain 15

Page 69

N.B.

Over 1.8 m, an electric lock is essential to ensure leaf blocking.

ELECTRIC WIRING DIAGRAM

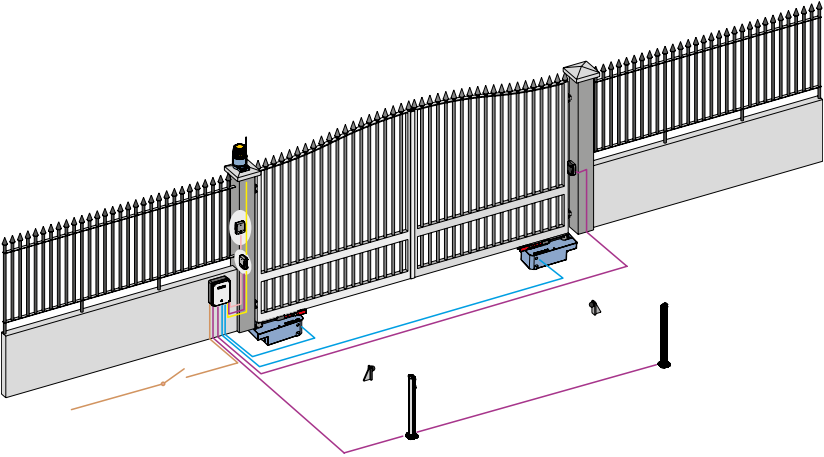

- Line3x1,5 mm²
- Motor*.2x2,5 mm²
- Flashing lamp2x1,5 mm²
- Selector2x0,5 mm²
- BUS connection2x0,5 mm²

* For 24Vdc motors, use 2x2.5 mm² cables - max. distance between motor and control unit 10 m

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
2	DIABLO Motors	6170082
1	Electronic Control Board BRAIN 15	6100263
2	DIABLO bearing boxes with 180° release system	6100319
1	RQFZ 868 MHz Frequency Module	6100146
1	Four-Channel Transmitter KILO TX2 JLC	6100332
1	24V GUARD Flashing Lamp	6100054
1	Pair of VEGA BUS Photocells	6100148
1	QUICK 1 key-operated selector for outdoor use	JA31101-15

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Material description	Part number
1	Pair of VEGA BUS Photocells	6100148
2	Column for photocell	6100149
2	Foundation plate for column	6100150

ACCESSORIES



DIABLO FOUNDATION BOX WITH RELEASE SYSTEM
Max. opening angle up to 180°.

Code 6100319



MECHANICAL STOP KIT
In order to avoid the use of on-ground mechanical stops.

Code 6100320



ABSOLUTE ENCODER KIT
Consisting of Encoder and relevant support to constantly detect the position of the leaf.

Code 6100321



BATTERY KIT
With recharging board.

Code 6100144




Polyester painting also suitable for installation in salty environment

MOTOR FOR SWING GATES

- Leaves up to 3.5 m and max 500 Kg each leaf
- G-WAY System (with Brain 15 and Brain 17 control boards)
- **PROcoder** Safety System (with Brain 15 and Brain 17 control boards)
- Release through a user friendly accessory lever and customised key - **PATENTED**
- Three mechanical reduction phases with steel worm-screw
- Opening and closing slow down available in both versions
- Double painting layer motor
- 3 different foundation casing models
- Kit for opening to 140° and 180°
- Optional mechanical leaf stop in opening and closing.

Code	Name	Version	Voltage	Leaf max. length	Use
6170077	Roller	Non-reversible	230V	3.5 m.	Residential
6170080	Roller 24	Non-reversible	24V	3.5 m.	Residential

OPERATOR DIMENSIONS

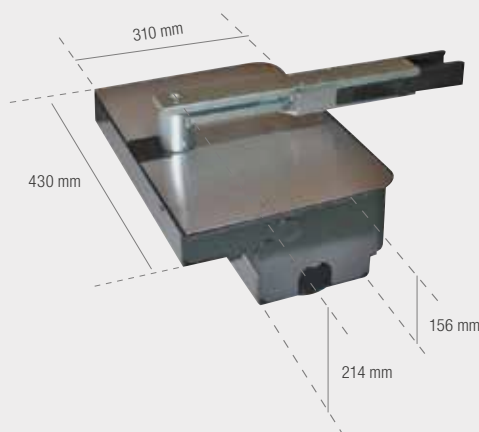


Technical Specifications	Roller	Roller 24
Power supply (V)	230	24
Nominal power (W)	380	70
Current (A)	1.7	3
Capacitor (µF)	12,5	-
Max. torque (Nm)	330	300
Angular speed (°/sec)	6	
Leaf opening time at 90° (sec.) ¹	18 (110°/180°)-10.5 (140°)	
Frequency of use at 20 °C	S3 - 30%	continuous
Operating ambient temperature (°C)	-20 +55	
Protection class	IP67	
Weight (kg)	26,5	

CONTROL BOARDS

Brain 17	Page 68
Brain 592	Page 68
Brain 15	Page 69

N.B.

1 - Opening time and max. leaf dimensions calculated for correctly executed installations at the dimensions indicated in the installation instructions and without slow-downs.
Over 2 m, an electric lock is essential to ensure leaf blocking.

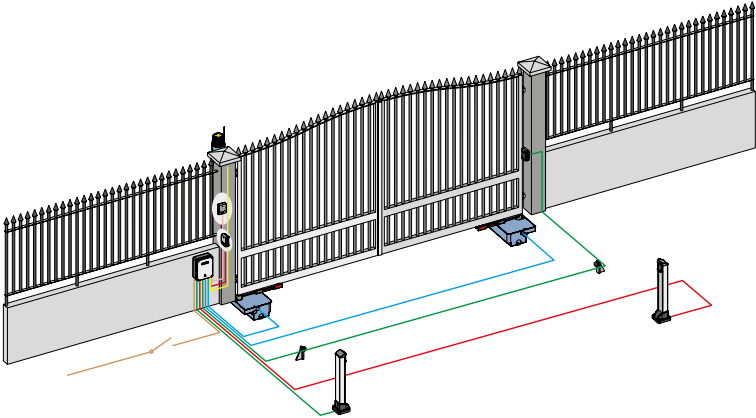

- Line3x1,5 mm²
- Motor*.4x1,5 mm²
- Flashing lamp2x1,5 mm²
- Selector2x0,5 mm²
- TX photocells2x0,5 mm²
- RX photocells4x0,5 mm²

* For 24Vdc motors, use 2x2.5 mm2 cables - max. distance between motor and control unit 10 m

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
2	ROLLER Motors	6170077
1	Electronic Control Board BRAIN 592	JA592
1	RC 433 one-channel receiver	6100110
1	Electronic Control Board Enclosure	JA320
1	Four-Channel Transmitter ECHO TX4 JLC	6100334
2	ROLLER BOX bearing boxes	58P0050
2	Release Device with 110° opening key	6100286
1	Single Channel Card Receiver 433 MHz	6100110
1	Four-Channel Transmitter ECHO TX4 TRC	6100334
1	230V GUARD Flashing Lamp	6100052
1	VEGA Photocells	6100147
1	QUICK 1 key-operated selector for outdoor use	JA31101-15

Material to add in order to get the configuration as per Wiring Diagram


Q.ty	Material description	Part number
1	Pair of ORION photocells	JA310
2	Column for photocell	JA325
2	Foundation plate for column	JA328

ACCESSORIES



ROLLER BOX
Foundation box in steel.
Cover in galvanised steel.

Code 58P0050



ROLLER BOX INOX
Foundation box in stainless steel.
Cover in stainless steel.

Code 58P0052



RELEASE DEVICE
For 110° opening.
PATENT

Code 6100286



KIT FOR OPENING TO 140°
To obtain an opening angle of 140° 1

Code 6100317



KIT FOR OPENING TO 180°
To obtain an opening angle of 180° 2

Code 6100318



ABSOLUTE ENCODER UNIT³
Gives the exact position of the leaf.

Code 6100322

Cover in stainless steel.

Code 58P0051



OPENING MECHANICAL STOP 2
For levers 110°/140°.

Code 58P0047



CLOSING MECHANICAL STOP
For levers 110°/140°.

Code 58P0048



ADAPTER
For installing ROLLER in existing foundation boxes.

Code 58P1573



BATTERY KIT
With recharging board.
Only for 24V models

Code 6100144

1 - levers to be added to 6100286 to get a 140° opening angle.
2 - gears to be added to 6100286 to get a 180° opening angle.
3 - it can be used for Rollers and Brain 17 board.



Automated systems for
SLIDING GATES

Selection

GUIDE

Sliding gate

Max. weight 400 Kg	
24V	
Blizzard 400 C ENC	Page 34
Max. weight 500 Kg	
230V	
Blizzard 500 C ENC	Page 32
Max. weight 800 Kg	
24V	
Blizzard 800 C ENC	Page 34
Max. weight 900 Kg	
230V	
Blizzard 900 C ENC	Page 32
Max. weight 1400 Kg	
230V	
Falcon M14	Page 36
Max. weight 2000 Kg	
230V	
Falcon M20	Page 36

Blizzard 230V



integrated encoder



Simple release device
with key (optional)

Die-cast aluminium basement

GEARMOTOR FOR SLIDING GATES

- Available versions: 230V for gates up to 500-900 Kg.
- Sturdy inner kinematic mechanism.
- Magnetic Limit Switches.
- Electronic control board with transparent plastic enclosure and external programming buttons.
- Huge selection of operating logics and working parameters.
- Compact dimensions.
- Big internal space for wiring; easy operator height and depth installation adjustments.

Code	Name	Version	Voltage	Leaf Weight	Use
61100821	Blizzard 500 C ENC	Non-reversible - Sprint 382 on board	230V	500 kg	Residential/Condominium
61100861	Blizzard 900 C ENC	Non-reversible - Sprint 382 on board	230V	900 kg	Residential/Condominium

OPERATOR DIMENSIONS




Technical Specifications	Blizzard 500 C ENC	Blizzard 900 C ENC
Power supply (V)	230	
Nominal power (W)	360	540
Thermal Protection (°C)	140 (self-resetting)	
Capacitor (µF)	10	12,5
Max thrust force (N)	390	590
Type of pinion gear	Z16 mod.4	
Leaf speed (m/min)	12	
Frequency of use at 20°C	S3 - 50%	
Operating ambient temperature (°C)	-20 +55	
Protection class	IP44	
Weight (kg)	9,2	10

CONTROL BOARDS

Sprint 382

Page 69

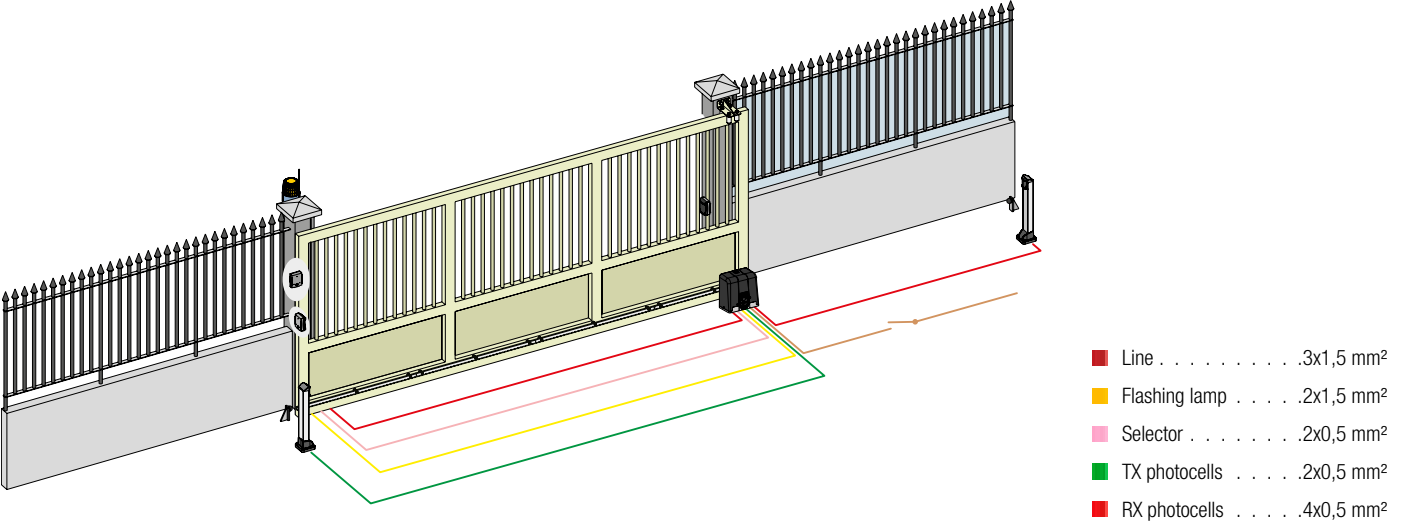

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
1	BLIZZARD 500 C ENC Gearmotor with incorporated control board and encoder	61100821
1	Foundation Plate	737000
4 m	Galvanised Rack 30x12 with weld-on fittings	JA146
1	5-PIN one-channel receiver 868 MHz	JA335
1	Two-channels transmitter KILO TX2 JLC	6100332
1	230 V GUARD flashing lamp	6100052
1	VEGA Photocells	6100147
1	QUICK 1 key-operated selector for outdoor use	JA31101-15

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Material description	Part number
1	Pair of ORION photocells	JA310
2	Column for photocell	JA325
2	Foundation plate for column	JA328

ACCESSORIES



RACK
1 m. in galvanized iron 30 x 12 mm².

Code **JA146**



RACK
1 m in nylon with steel core 30 x 12 mm².

Code **JA221**



SPACERS
Kit of 3 spacers and M8x30 screw-on fastening screws for 1 meters of iron rack².

Code **JA147**



SPACERS
Kit of 3 spacers and M8x50 screw-on fastening screws for 1 meters of iron rack².

Code **JA148**



SCREWS
Kit of 24 fastening screw-on screws

Code **JA222**



LOCK
Lock with personalized key

Code **424413**



FOUNDATION PLATE

Code **737000**



ADAPTER PLATE
BLIZZARD-MILORD

Code **737001**

1 - 6 m package.
2 - 6 kits package.

Blizzard 24V



**available from
June 2017**

integrated encoder



Simple release device
with key (optional)

Die-cast aluminium basement

GEARMOTOR FOR SLIDING GATES

- Available versions for gates up to 400-800 Kg.
- Complete movement control and effective reverse on obstacle response.
- Magnetic Limit Switches.
- Electronic control board with transparent plastic enclosure and external programming buttons.
- Huge selection of operating logics and working parameters.
- Compact dimensions.
- Big internal space for wiring; easy operator height and depth installation adjustments.

Code	Name	Version	Voltage	Leaf Weight	Use
6110080	BLIZZARD 400 C ENC	Non-reversible - Sprint M24 on board	24V	400 kg	Residential/Condominium
6110084	BLIZZARD 800 C ENC	Non-reversible - Sprint M24 on board	24V	800 kg	Residential/Condominium

OPERATOR DIMENSIONS




Technical Specifications	Blizzard 400 C ENC	Blizzard 800 C ENC
Power supply (V)	24	
Nominal power (W)	140	
Max thrust force (N)	310	410
Type of pinion gear	Z16 mod.4	
Leaf speed (m/min)	12	
Use frequency	Continuous	
Operating ambient temperature (°C)	-20 +55	
Protection class	IP44	
Weight (kg)	7	

CONTROL BOARDS

Sprint M24

Page 70

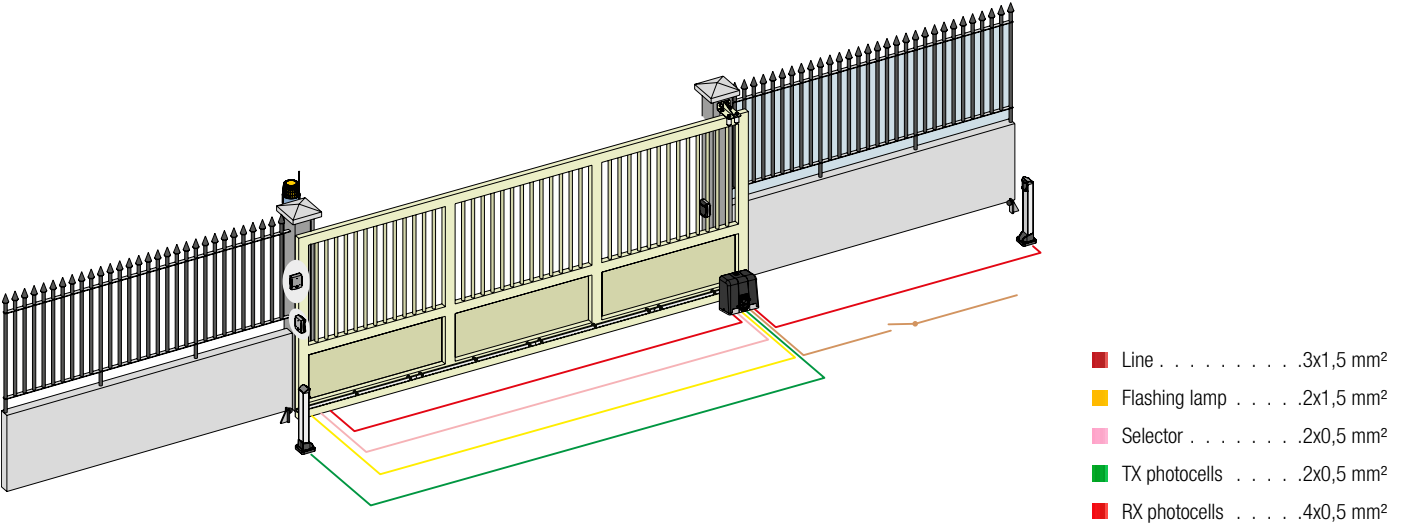

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
1	BLIZZARD 400 C ENC Gearmotor with incorporated control board and encoder	6110080
1	Foundation Plate	737000
4 m	Galvanised Rack 30x12 with weld-on fittings	JA146
1	5-PIN one-channel receiver 868 MHz	JA335
1	Two-channels transmitter KILO TX2 JLC	6100332
1	230 V GUARD flashing lamp	6100052
1	Pair of VEGA BUS Photocells	6100148
1	QUICK 1 key-operated selector for outdoor use	JA31101-15

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Material description	Part number
1	Pair of ORION photocells	JA310
2	Column for photocell	JA325
2	Foundation plate for column	JA328

ACCESSORIES



RACK
1 m. in galvanised iron 30 x 12 mm¹.

Code **JA146**



RACK
1 m in nylon with steel core 30 x 12 mm¹.

Code **JA221**



SPACERS
Kit of 3 spacers and M8x30 screw-on fastening screws for 1 meters of iron rack².

Code **JA147**



SPACERS
Kit of 3 spacers and M8x50 screw-on fastening screws for 1 meters of iron rack².

Code **JA148**



SCREWS
Kit of 24 fastening screw-on screws

Code **JA222**



LOCK
Lock with personalized key

Code **424413**



FOUNDATION PLATE

Code **737000**



ADAPTER PLATE
BLIZZARD-MILORD

Code **737001**



BATTERY KIT
With recharging board.

Code **6100144**

1 - 6 m package.
2 - 6 kits package.

Falcon M14 - M20



Gearmotor body in aluminium painted with polyester powders and protective housing in ABS

Magnetic limit switch entirely protected

GEARMOTOR FOR SLIDING GATES

- Available version: 230V for gates up to 1400 - 2000 Kg
- Optional Encoder installation for obstacle detection
- Sturdy inner kinematic mechanism made of a bronze crown and steel worm-screw
- Magnetic Limit Switches
- Electronic Control Board with Transparent plastic Enclosure and external programming buttons
- Rotating Panel for easier programming
- Gearmotor body painted with polyester powder.
- User friendly release system protected by personalized key.

Code	Name	Version	Voltage	Leaf Weight	Use
6110002	Falcon M14 C	Non-reversible - integrated Sprint 382	230V	1400 kg	Industrial
6110022	Falcon M20 C	Non-reversible - integrated Sprint 382	230V	2000 kg	Industrial

OPERATOR DIMENSIONS




Technical Specifications	Falcon M14	Falcon M20
Power supply (V)	230	
Nominal power (W)	650	800
Current (A)	2.80	3.5
Thermal Protection (°C)	140	
Capacitor (µF)	16	20
Max. torque (Nm)	35	45
Thrust on pinion (daN)	110	150
Type of pinion gear	Z16 mod. 4	
Angular speed (m./min.)	10	
Frequency of use at 20 °C	S3 - 40%	
Operating ambient temperature (°C)	-20 +55	
Protection class	IP44	
Weight (kg)	14	15

CONTROL BOARDS

Sprint 382
Geo 05

Page 69
Page 73

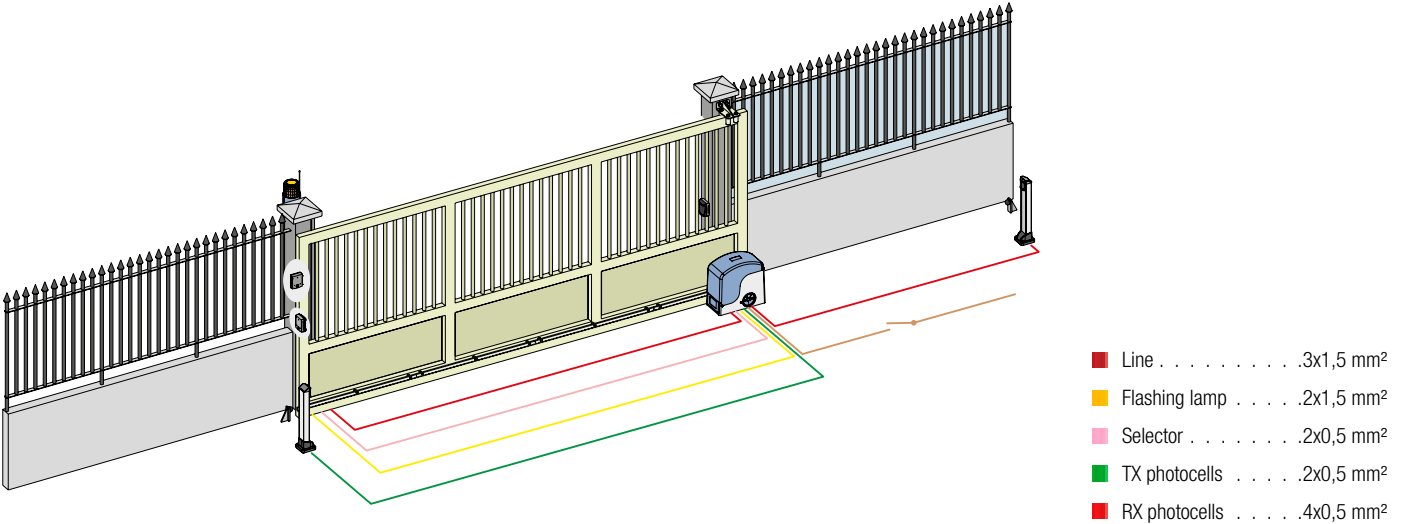

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
1	FALCON M14C Gearmotor with incorporated control board and foundation plate	6110002
4 m	Galvanised Rack 30x12 with weld-on fittings	JA146
1	5-PIN one-channel receiver 868 MHz	JA335
1	Four-Channel Transmitter KILO TX2 JLC	6100332
1	230V GUARD Flashing Lamp	6100052
1	VEGA Photocells	6100147
1	QUICK 1 key-operated selector for outdoor use	JA31101-15

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Description	Part number
1	Pair of ORION photocells	JA310
2	Column for photocell	JA325
2	Foundation plate for column	JA328

ACCESSORIES



RACK
1 m. in galvanised iron 30 x 12 mm¹.

Code **JA146**



SPACERS
Kit of 3 spacers and M8x30 screw-on fastening screws for 1 meters of iron rack².

Code **JA147**



SPACERS
Kit of 3 spacers and M8x50 screw-on fastening screws for 1 meters of iron rack².

Code **JA148**



ENCODER
Grants a more precise motor control and enables a reactive reverse on obstacle

Code **6100013**

1 - 6 m package.
2 - 6 kits package.



Automated systems for
garage doors e rolling shutters

Selection

GUIDE

Up-and-over Garage Doors

Door (bxh) 3.3 x 3 m	
230V	
Euro Breeze 06	Page 40
Door (bxh) 5 x 2.5 m	
24V	
Zodiac 60	Page 42
Door (bxh) 5 x 3.1 m	
24V	
Zodiac 100	Page 42


Rolling shutters

Max. weight 250 Kg	
230V	
Shutter 15	Page 44
Max. weight 270 Kg	
230V	
Shutter 20	Page 44
Max. weight 430 Kg	
230V	
Shutter B 40	Page 44

Euro Breeze 06



integrated encoder

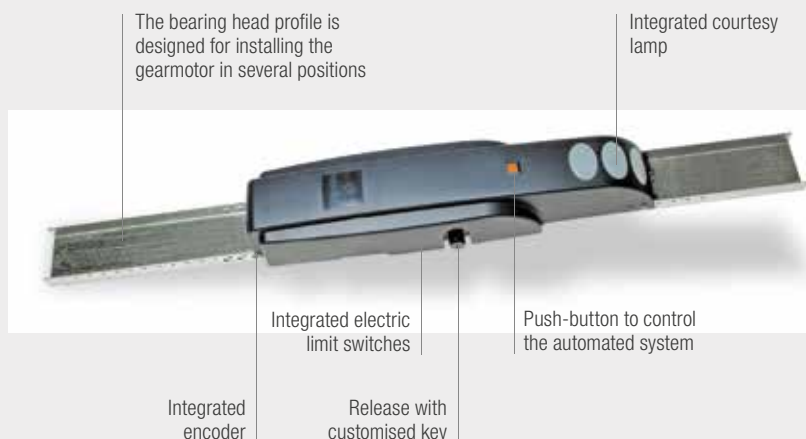

MOTOR FOR UP-AND-OVER DOORS AND COUNTER-WEIGHTS

- Available version: 230V for single door up to 10m² and in double applications up to 15m².
- Pre-drilled mounting head section for assembling the motor in different positions.
- Integrated courtesy lamp.
- Integrated push-button to control the automated system.
- Motor release system through customised key to be ordered separately.
- Available version: with integrated electronic control board, encoder and limit switches

Code	Name	Version	Voltage	Max. door (b x h)	Use
6120045	Euro Breeze 06 Sb/LH	Non-reversible	230V	3.3 x 3 m.*	Residential
6120036	Euro Breeze 06 C Sb/RH	Non-reversible -integrated Geo 07 control board	230V	3.3 x 3 m.*	Residential

* 5 x 3 m. with 2 motors.

OPERATOR DIMENSIONS



Technical Specifications	Euro Breeze 06
Power supply (V)	230
Power (W)	350
Current (A)	1.5
Thermal Protection (°C)	140
Capacitor (µF)	10
Max. torque (Nm)	300
Angular speed (°/sec)	12
Opening time at 90° (sec.) ¹	15
Frequency of use at 20 °C	S3 - 30%
Indicative hour cycles at 20°C	≥36
Operating ambient temperature (°C)	20 +55
Operator weight (Kg)	7.5
Protection class ²	IP44

CONTROL BOARDS

Geo 07


Page 71

N.B.

1 - Opening time and max. door dimensions calculated for correctly executed installations at the dimensions indicated in the installation instructions and without slow-downs.

2 - Gearmotor has to be considered as IP44 when the IP44 kit for control board code 58P0395 is used.

ELECTRIC WIRING DIAGRAM

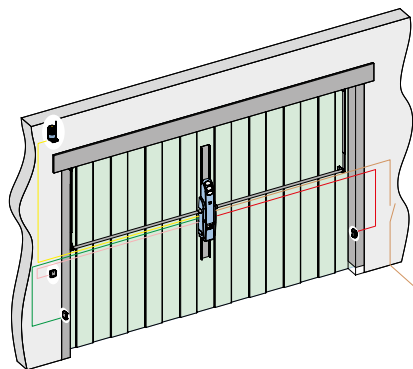

- Line 3x1,5 mm²
- Flashing lamp 2x1,5 mm²
- Selector 2x0,5 mm²
- TX photocells 2x0,5 mm²
- RX photocells 4x0,5 mm²

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
1	EURO BREEZE 06 C motor with incorporated control board	6120036
1	Head Profile length 1.5 m.	58P0584
1	Package of straight arms	58P0387
1	Pair of transmission tubes	58P0380
1	Key-operated external release	58P0398
1	5-PIN one-channel receiver 868 MHz	JA335
1	Four-Channel Transmitter KILO TX2 JLC	6100332

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Material description	Part number
1	QUICK 1 key-operated selector for outdoor use	JA31101-15
1	230V GUARD Flashing Lamp	6100052

ACCESSORIES



EXTERNAL RELEASE
For application to existing handle

Code **58P0398**



BUSHES
Set of 6 grooved bushes.

Code **58P0371**



PUSH-BUTTONS
6 push-buttons for up-and over door.

Code **58P2015**



TRANSMISSION TUBES
2 galvanised tubes for side application.
Length 200 mm.

Code **58P0379**



TRANSMISSION TUBES
2 galvanised tubes for central application.
Length 1500 mm.

Code **58P0380**

Length 2050 mm.



KEY OPERATED PLUG
For external release system door thickness up to 45 mm.

Code **6100015**

Door thickness up to 45 mm.



HEAD PROFILES
Length 2000 mm.

Code **58P0587**

Length 1500 mm.



KIT OF 2 CURVED ARMS
With brackets to be welded.


Code **6100127**




KIT OF 2 STRAIGHT ARMS
With brackets to be welded.

Code **58P0392**


ARMS TO BE WELDED



Code **58P0381**



Code **6100014**



Code **58P0584**

Length 1300 mm.

Code **58P0583**

Length 700 mm.

Code **6100264**

With welded perforated bush.



KIT OF 2 STRAIGHT ARMS
With grooved welded bush. For side applications with 2 motors.

Code **58P0387**

Code **58P0386**

Code **58P0387**



Basis made of sturdy plastic material which reduces weight and enhances handiness


SPRING UP-AND-OVER MOTOR, SECTIONAL AND COUNTERWEIGHTS DOOR OPERATOR

- Available version: 24V with 600N thrust (Zodiac 60) and 1000N (Zodiac 100)
- PATENTED three steps driving rail assembly
- Standard supplied with power cable and plug.
- Arranged for Low-consumption lamps
- Integrated courtesy lamp
- Easy Access to Programming Panel, no need to open the motor lid
- Integrated push-button to control opening.

Code	Name	Version	Voltage	Max. sectional door (bxh)*	Max. up-and-over door (bxh)*
6120041	Zodiac 60	Non-reversible - 600 N thrust - Geo 08 on board	24V	5 X 2.50 m.	3 X 2.50 m.
6120042	Zodiac 100	Non-reversible - 1000 N thrust - Geo 09 on board	24V	5 X 3.10 m.	3 X 3.10 m.

* Maximum height depends on the door geometry. The indicated values refer to traditional configurations.

OPERATOR DIMENSIONS

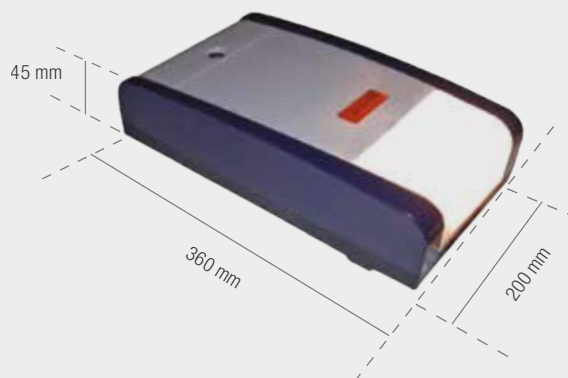


Technical Specifications	Zodiac 60	Zodiac 100
Power supply (V)	230	
Electric motor (V)	24	
Power (W)	220	350
Thrust (daN)	600	600/1000
Max. consecutive cycles	30	
Max. carriage travel (mm.)	1900 - 2500 - 3100	
Carriage speed, load free (m/min.)	6.6	
Frequency of use at 20 °C	80 cycles per day	
Operating ambient temperature (°C)	-20 +55	
Operator weight (Kg)	6.6	
Protection class	IP20	

CONTROL BOARDS

Geo 08	Page 72
Geo 09	Page 72

ELECTRIC WIRING DIAGRAM

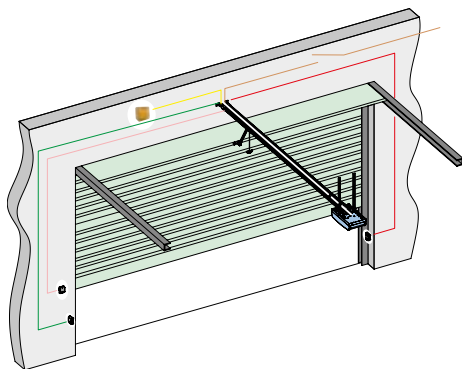

- Line 3x1,5 mm²
- Flashing lamp 2x1,5 mm²
- Selector 2x0,5 mm²
- TX photocells 2x0,5 mm²
- RX photocells 4x0,5 mm²

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
1	ZODIAC 60 Motor	6120041
1	Single chain rail, travel 1900 m	6100059
1	Cable for external release (application on existing handle)	610006
1	RQFZ 868 MHz Frequency Module	6100146
1	Four-Channel Transmitter KILO TX2 JLC	6100332

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Material description	Part number
1	QUICK 1 key-operated selector for outdoor use	JA31101-15
1	VEGA Photocells	6100147
1	LEDDY 24V Lamp	6100190

ACCESSORIES



BATTERY KIT
With recharging board.

Code **6100144**



LEDDY
24 Vdc with integrated flashing.

Code **6100190**



RAIL CENTRAL SUPPORT
Single rail

Code **6100125**



EXTERNAL RELEASE
Cable for external release, with application on existing handle for sectional doors.
In pairing with adapter arm for up-and-over doors with counter-weights, use the external release.
Code 58P0398 on page 41

Code **610006**



CABLE RELEASE KIT
External release kit with 1.5 m Bowden cable, cable stopper and cylinder with coded key.

Code **6100285**



RADIOFREQUENCY MODULE
RQFZ 3PIN for GENIUS.
433 MHz

Code **6100145**

868 MHz



ARM FOR SECTIONAL DOORS
Arm for sectional doors.

Code **6100107**



ADAPTER ARM
For up-and-over doors with counter-weights of max. height 2400 mm.

Code **6100156**



CHAIN/BELT RAILS*

Rail type	Description*	Code
G 1900 - 1C	With chain, travel 1900 mm 1 piece	6100059
G 2500 - 1C	With chain, travel 2500 mm 1 piece	6100060
G 3100 - 1C	With chain, travel 3100 mm 1 piece	6100061
G 2500 - 2C	With chain, travel 2500 mm 2 pieces	6100105
G 3100 - 2C	With chain, travel 3100 mm 2 pieces	6100106
G 1900 - 1B	With belt, travel 1900 mm 1 piece	6100111
G 2500 - 1B	With belt, travel 2500 mm 1 piece	6100112
G 3100 - 1B	With belt, travel 3100 mm 1 piece	6100113
G 2500 - 2B	With belt, travel 2500 mm 2 pieces	6100114
G 3100 - 2B	With belt, travel 3100 mm 2 pieces	6100115

*N.B. The indicated measures correspond to effective carriage travel. The rail overall dimensions (including motor) are 900 mm over the travel for Zenith and 870 mm over the travel for Zodiac.



ARMO 24V
With release device and control push button.

Code **6100221**



LOCK
Cylindrical lock for ARMO no. 1-10

Code **610025701-10**




OPERATOR FOR SHUTTERS

- It does not need any maintenance at all, it is low silent and quick to install
- The manual release acts directly on the gearing, with the advantage of making the shutter lighter to move
- Semi-automatic, micrometric control of the limit switch

Code	Name	Version	Voltage	crown wheel ø	ø supporting pole	Lifting capacity
6140003	Shutter 15 R	Reversible	230V	200 ¹	60 ²	170 kg
6140004	Shutter 15	Non-reversible with electromagnetic brake	230V	200 ¹	60 ²	170 kg
6140009	Shutter 20 R	Reversible	230V	240	76	280 kg
6140010	Shutter 20	Non-reversible with electromagnetic brake	230V	240	76	260 kg
6140005	Shutter B 40	Two motors, irreversible with electromagnetic brake	230V	240	76	360 kg

OPERATOR DIMENSIONS

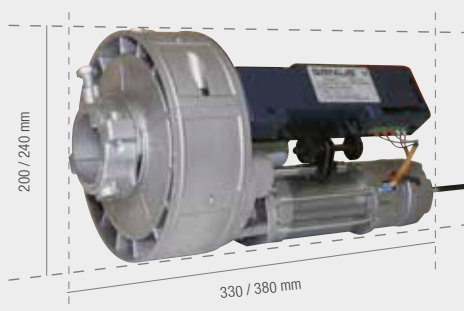


Technical Specifications	15 (200/60)		15 R (200/60)		20 (240/76)	20 R (240/76)	B 40 (240/76)
Power supply (V)	230	115	230	115	230	230	230
Frequency (Hz)	50	60	50	60	50	50	50
Torque (Nm)	170				280		400
Power (W)	630	610	630	610	1260		
Absorbed current (A)	2.7	5.2	2.7	5.2	5.4		
Max. work time (Min.)	4						
Max. rolling shutter height	6						
Operating ambient temperature (°C)	-20 +55						

N.B.

1 - The crown wheel diameter can be of 220 mm using the relevant plastic clamp included in the package of the Shutter 15 models.

2 - To be used also with supporting poles Ø 48mm, Ø 42mm or Ø 33mm adding the optional adapters in the next page.

ELECTRIC WIRING DIAGRAM

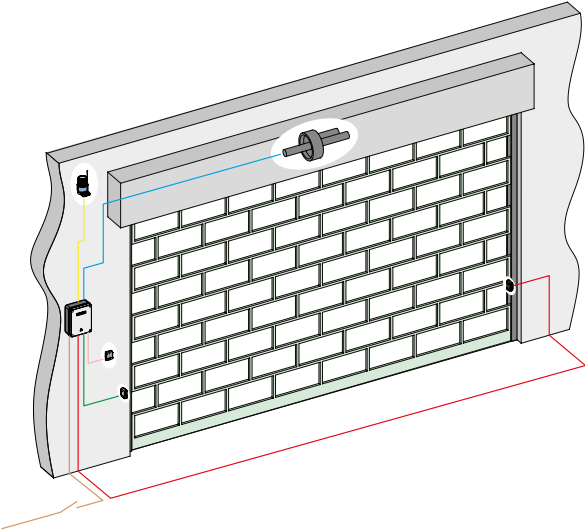

- Line3x1,5 mm²
- Motor4x1,5 mm²
- Flashing lamp2x1,5 mm²
- Selector2x0,5 mm²
- TX photocells2x0,5 mm²
- RX photocells4x0,5 mm²

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
1	SHUTTER 15 R gearmotor	6140003
1	Electro-brake for SHUTTER 15 R	6100247
1	GEO 13 control board with "step-by-step" logic	6100306
1	Electronic Control Board Enclosure	6100140
1	ARMO 24 Anti-burglary key-operated selector with lever release	6100221

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Material description	Part number
1	VEGA Photocells	6100147
1	230V GUARD Flashing Lamp	6100052

ACCESSORIES



ARMO 24V
With release device and control
push button.

Code 6100221



ARMO 230V
With release device and control
push button.

Code 6100220



LOCK
Cylindrical lock for ARMO no.
1-10

Code 610025701-10



ELECTROMAGNETIC
BRAKE KIT

Code 6100247



Adapters for supporting
pole
Adapter for 60/33 tube
For Shutter 15

Code 6100273

for 60/42 tube

Code 6100274

for 60/48 tube

Code 6100275



Automated systems for
industrial doors

Selection

GUIDE

Industrial closing

Max. weight 680 Kg

230V	
Mercury	Page 48
400V	
Mercury 3 PH	Page 48

Door (bxh) 3 x 5 m

230V	
Trigon K	Page 50
24V	
Trigon K 24	Page 50




OPERATOR FOR INDUSTRIAL DOORS


- Extremely compact and silent single- and three-phase gearmotor
- Gearmotor for worm-screw / non-reversible crown entirely in oil bath to ensure door mechanical block
- Possibility of installation directly on rope winding drum shaft or through chain transmission
- In the manual release system, in models with winch, there is a specific mechanism which disables power supply during chain pull phase.

Code	Name	Version	Voltage	Use
6120034	Mercury CV Plus	Non-reversible with incorporated Plus control board and winch	230V	Industrial
6120024	Mercury 3 PH	Non-reversible without control board with winch - motor 3 PH	400V	Industrial

OPERATOR DIMENSIONS

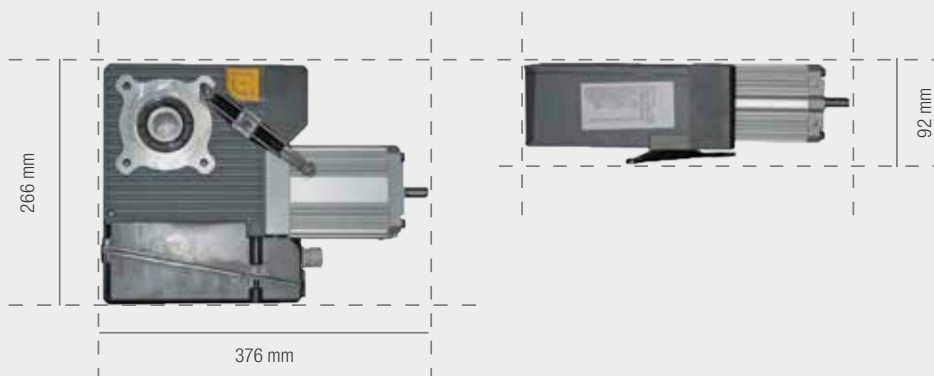

Technical Specifications	Mercury CV Plus	Mercury 3 PH
Power supply (V)	230	400
Power (W)	800	420
Current (A)	3.5	1.1
Capacitor (µF)	20	-
Rotation speed (rev./min.)	23	
Thermal Protection (°C)	140	
Frequency of use at 20 °C	S3 - 40%	S3 - 60%
Max. consecutive cycles	5	6
Drive transmission	Through shaft ø 25.4 mm	
Shaft rated torque (Nm)	50	70
Max. rotations of rope winding drum	24 rotations	
Operating ambient temperature (°C)	-20 +55	
Gearmotor weight (kg)	14	
Protection class	IP54	

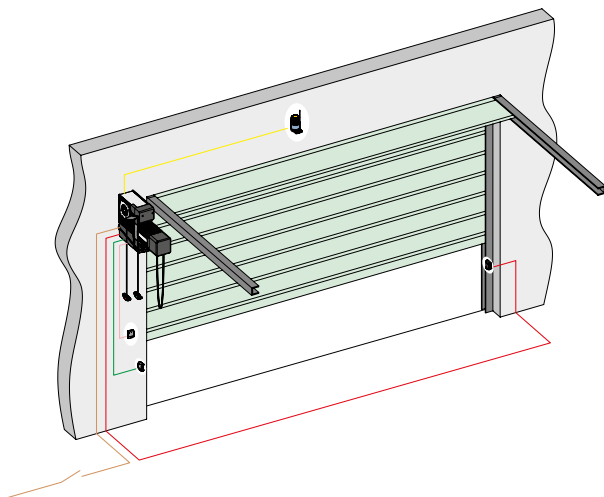

- Line 3x1,5 mm²
- Flashing lamp 2x1,5 mm²
- Selector 2x0,5 mm²
- TX photocells 2x0,5 mm²
- RX photocells 4x0,5 mm²

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
1	MERCURY CV PLUS gearmotor with incorporated electronic control board	6120034
1	5-PIN one-channel receiver 868 MHz	JA335
1	Four-Channel Transmitter KILO TX2 JLC	6100332
1	VEGA Photocells	6100147

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Material description	Part number
1	QUICK 1 key-operated selector for outdoor use	JA31101-15
1	230V GUARD Flashing Lamp	6100052

ACCESSORIES

CONTROL BOARDS

Geo 05

Page 73



TRANSMISSION KIT
off axis transmission kit.Ratio
1:1.5.



WINCH EXTENSION
chain 8 m.



RELEASE EXTENSION
8 m.



FIXING PLATE
For winch adjustment.

Code **6100109**Code **6100122**Code **6100121**Code **6100123**

Off axis transmission kit Ratio 1:2

Code **6100120**

DEFINITION OF THE MOTION TRANSMISSION ON MERCURY ACCORDING TO Ø DRUM AND DOOR WEIGHT						SINGLE-PHASE 230Vac	THREE-PHASE 400Vac
DRUM TYPE	Ø MAX [mm]	Door MAX Weight [Kg]	Gross torque necessary [Nm]	Balance [%]	Net Torque [Nm]	Recommended transmission	
M-102 2400	124	241	146,4	85	22,0	Direct	
M-102 3125	127	340	211,6	85	31,7	Direct	
M-102 3965	125	500	306,3	85	45,9	Transmission 1:1.5	Direct
M-134 5500	152	680	506,5	85	76,0	Transmission 1:2	Transmission 1:1.5
M-203 9750	230	1000	1127,0	85	169,1	Not possible	
M-203 9750	230	1000	1127,0	85	169,1	Not possible	
ALB. 31.75						Not possible	
M-102 1375	153	250	187,4	85	28,1	Direct	
M-134 1375	190	455	423,6	85	63,5	Transmission 1:1.5	Direct
M-146 3050	280	455	624,3	85	93,6	Not possible	Transmission 1:1.5
FF HL 164	280	575	788,9	85	118,3	Not possible	Transmission 1:2
FF HL 164/54							
ALB. 31.75							
M-216 3350	225	386	425,6	85	63,8	Transmission 1:1.5	Direct
M-280 5500	280	454	622,9	85	93,4	Not possible	Transmission 1:1.5
FF VL 28/54	350	750	1286,3	85	192,9	Not possible	
ALB. 31.75						Not possible	

N.B. The torque values expressed by the gearmotor can be subject to reductions due to motor performance drops caused by temperature increase.

Trigon K



G-WAY
BUS

ENV
PATENT



GEARMOTOR FOR FOLDING DOORS

- Rotation of the output pin combined with a telescopic arm moves the door, ensuring it locks at closure.
- Patented virtual encoder and G-WAY Bus (with Brain 15 control board or Brain 17).
- The electrical limit-switches at opening and closing (optional), with simple adjustment facility are easy to install.
- The release system with customised key enables the door to be moved by hand, also in case of a power cut.
- For application on large folding doors with two panels, up to 3m in width and max. height of 5 m.

Code	Name	Version	Voltage	Max. door (bxh)
6170152	Trigon K	Non-reversible	230V	3 X 5 m.
6170153	Trigon K - 24	Non-reversible	24V	3 X 5 m.

OPERATOR DIMENSIONS




Technical Specifications	Trigon K	Trigon K - 24
Power supply (V)	230	24
Power (W)	280	40
Current (A)	1.2	2
Thermal Protection (°C)	140	-
Capacitor (µF)	8	-
Angular speed (°/sec)	8	-
Frequency of use at 20 °C	S3 - 30%	100%
Shaft rated torque (Nm)	250	200
Operating ambient temperature (°C)	-20 +55	
Gearmotor weight (kg)	11.5	
Protection class	IP44	

CONTROL BOARDS

Brain 17	Page 68
Brain 592	Page 68
Brain 15	Page 69

ELECTRIC WIRING DIAGRAM

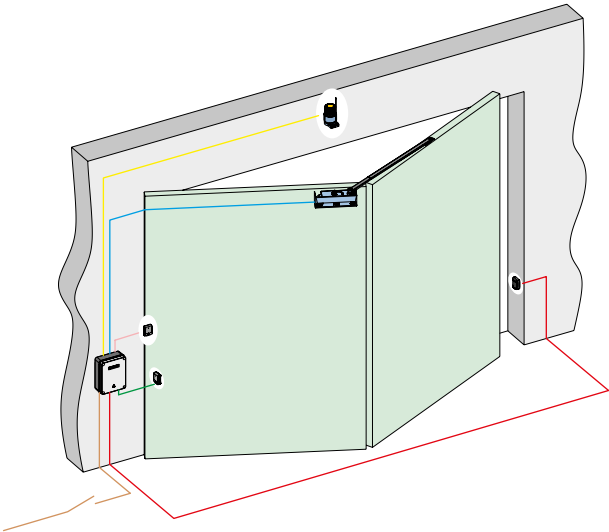

- Line3x1,5 mm²
- Motor*.4x1,5 mm²
- Flashing lamp2x1,5 mm²
- Selector2x0,5 mm²
- TX photocells2x0,5 mm²
- RX photocells4x0,5 mm²

* For 24Vdc motors, use 2x2.5 mm² cables - max. distance between motor and control unit 10 m

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
1	Trigon K motor	6170152
1	Telescopic arm	00058P0656
1	Electronic Control Board BRAIN 17	6100304
1	Electronic Control Board Enclosure	JA320
1	RQFZ 868 MHz Frequency Module	6100146
1	Four-Channel Transmitter KILO TX2 JLC	6100332
1	230V GUARD Flashing Lamp	6100052
1	VEGA Photocells	6100147
1	QUICK 1 key-operated selector for outdoor use	JA31101-15

ACCESSORIES



LIMIT SWITCH
For motor closing or opening limit stop.

Code 58P0653



ARM
Folding door telescopic arm kit.

Code 58P0656



INTERNAL RELEASE KIT
Internal release kit for folding door with 5 m cable and release knob.

Code 58P0658



EXTERNAL RELEASE KIT
External release kit for leaf door and folding gate with 5 m cable. N.B. Kit to be assembled together with safety enclosure.

Code 58P0659



ARMO 24V
With release device and control push button.

Code 6100221



LOCK
Cylindrical lock for ARMO no. 1-10

Code 610025701-10



ENCLOSURE FOR CONTROL BOARDS 230V

Code JA320



BATTERY KIT
With recharging board.
Only for 24V models

Code 6100144



Automatic barriers

Selection

GUIDE

Barrier

Residential

24V	
Max. beam length 4 m	
Simple.	Page 54

Residential / Condominium

230V	
Max. beam length 3 m	
Spin 3C ENC.	Page 57
Max. beam length 5 m	
Spin 4C ENC.	Page 57
Max. beam length 7 m	
Spin 6C ENC.	Page 57

Condominium / Industrial

24V	
Max. beam length 3 m	
Rainbow Fast 324 C	Page 60
Max. beam length 5 m	
Rainbow 524 C	Page 60
Max. beam length 7 m	
Rainbow 724 C	Page 60

Simple



Coded key inhibiting the board and preventing any involuntary restart of the gearmotor

AUTOMATIC BARRIER FOR MOTOR VEHICLES

- Available version: 24V for passages up to 4 m.
- The balance of the beam is automatic through the pre-installed torsion spring.
- **PATENTED** wall installation system, rather than floor installation.
- Integrated signalling lamp.
- The control unit is housed in an ergonomic and easy-to-reach enclosure.
- Encoder for obstacle detection.
- Release with a customised key.

Code	Name	Version	Voltage	Max. beam length
6130021	Simple C	Gearmotor with integrated Lynx 05 control board	24V	4 m.*

*Useful length: 200 mm less than the nominal length.

OPERATOR DIMENSIONS



Technical Specifications	Simple
Power supply (V)	230
Electric motor (V)	24
Nominal motor power (W)	48
Current (A)	0,35
Max. torque at 24Vdc (Nm)	130
Opening/closing nominal time (sec) ¹	3
Frequency of use at 20 °C	300 cycles per day
Operating ambient temperature (°C)	-20 +55
Noise (dBA)	>70
Protection class	IP44
Operator weight (Kg)	20 (38 Simple Kit)

CONTROL BOARDS

Lynx 05

Page 74

1 - Opening time for correctly executed installations at the dimensions indicated in the installation instructions and without slow-downs.

MANY FEATURES THAT MAKE THE DIFFERENCE.

Simple offers higher functionality while reducing installation time.



EASY INSTALLATION

The balance spring does not require adjustment.
The electronic control board is contained in an ergonomic and easy-access housing.



INTEGRATED PHOTOCELL SUPPORT

The product design features a practical integrated housing for positioning the photocell in line with the bar.



INTEGRATED FLASHING LAMP

The innovative design generates 2 beams of light for movement signalling.




EASY RELEASE

An innovative protection system with personalised key to disable the board and avoid accidental restarting of the reduction unit.



OBSTACLE DETECTING SYSTEM

Simple features a safety system that immediately detects the presence of an obstacle and reverses bar motion.

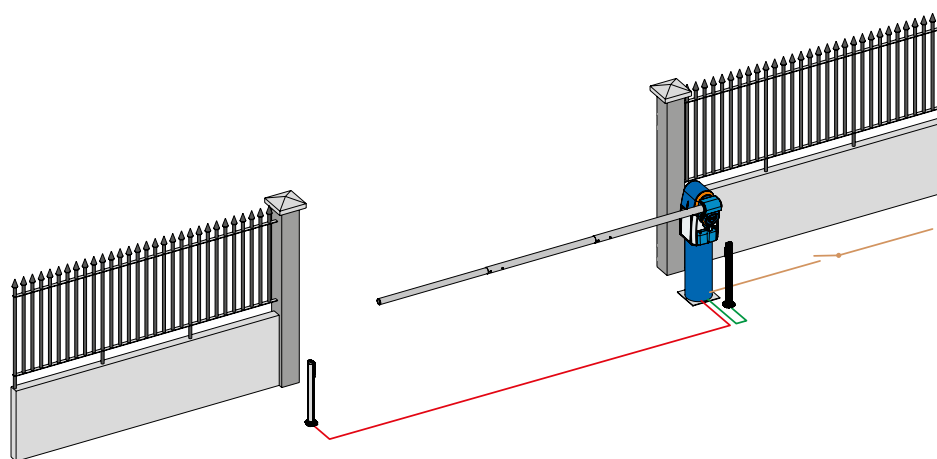

- Line3x1,5 mm²
- TX photocells2x0,5 mm²
- RX photocells4x0,5 mm²

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
1	SIMPLE C barrier body with incorporated LYNX 05 control board	6130021
1	Base kit	6100192
1	Pocket for beam, diameter 50	6100194
1	Beam diameter 50, length 4.00 m	6100197
1	RQFZ 433 MHz Frequency Module	6100145
1	Four-channels transmitter ECHO TX4 RC	6100334

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Material description	Part number
1	VEGA Photocells	6100147
2	Column for photocell	6100149
2	Foundation plate for column	6100150

ACCESSORIES



BATTERY KIT
With recharging board.

Code **6100144**



WALL BRACKET KIT

Code **6100193**



BASE KIT

Code **6100192**



PHOTOCELL SUPPORT KIT
Vega photocells and Vision for base kit.

Code **6100227**



POCKET
Pocket 50 mm for 4 m beam.

Code **6100194**



BEAM
Telescopic beam
Ø 50 - 4 m.

Code **6100197**




RADIOFREQUENCY MODULE
RQFZ 3PIN for GENIUS.
433 MHz

Code **6100145**

868 MHz

Code **6100146**



STICKERS KIT
6 stickers with Genius brand.

Code **6100201**



BALANCING KIT
For Simple beam with length shorter than the standard.

Beam type	Standard L. m.	Minimum L. m.
fixed beam	4	2,80

Code **6100200**

AUTOMATIC BARRIER FOR MOTOR VEHICLES

- Integrated control board with separate opening and closing inputs.
- Electrical and mechanical limit-switches supplied standard.
- Version 230V is supplied with the Encoder to ensure reversing of movement on detection of an obstacle.
- Rapidly transforms from right-hand to left-hand version.




Solid, sturdy load-bearing structure, in cataphoresis treated steel painted with polyester powders

Code	Name	Version	Voltage	Max. beam length
6130026	SPIN 3C ENC	Non-reversible, Fast with encoder and integrated Lynx 06	230V	3 m.*
6130027	SPIN 4C ENC	Non-reversible with encoder and integrated Lynx 06	230V	5 m.*
6130028	SPIN 6C ENC	Non-reversible, Slow with encoder and integrated Lynx 06	230V	7 m.*

*No type of accessory can be fitted on the beams installed on Spin 3 models. The articulated kit cannot be installed on beams of over 4 meters installed on Spin 4 models. No type of accessory can be fitted on beams of over 6 meters installed on Spin 6 models.

OPERATOR DIMENSIONS

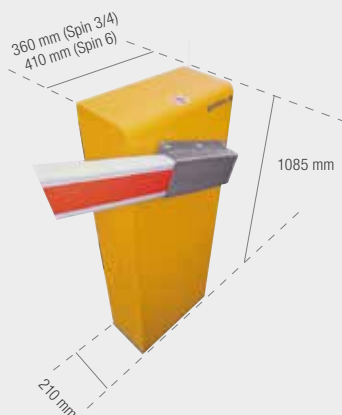

Technical Specifications	Spin 3 ENC	Spin 4 ENC	Spin 6 ENC
Power supply (V)	230		
Electric motor (V)	230		
Power (W)	250		380
Current (A)	1.1		1.7
Heat protection (°C)	140		
Thrust capacitor (µF)	12.5		
Max. torque (Nm)	60	100	150
Opening time (sec) 1	2.5	4	8
Frequency of use at 20 °C	S3 - 50%		S3 - 60%
Operating ambient temperature (°C)	-20 +55		
Protection class	IP44		
Operator weight (Kg)	63		69


CONTROL BOARDS

Lynx 06

Page 73

N.B.

1 - Opening time and number of cycles calculated for correctly executed installations at the dimensions indicated in the installation instructions and without slow-downs.

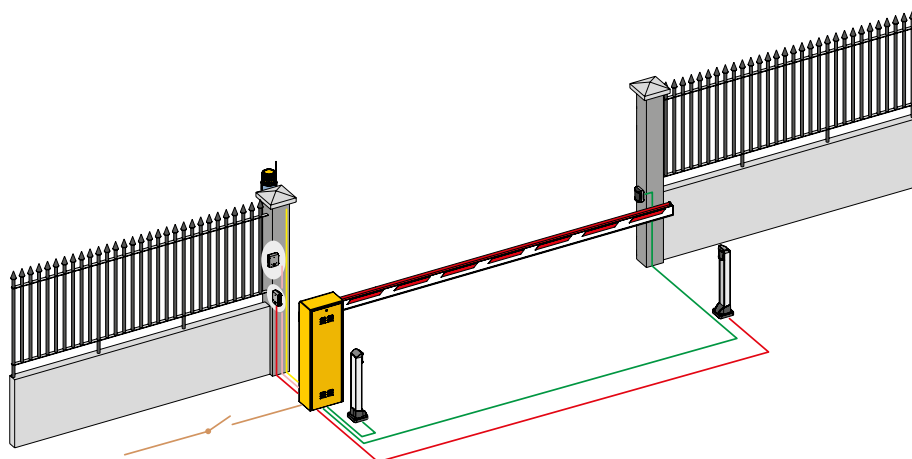

- Line3x1,5 mm²
- Flashing lamp2x1,5 mm²
- Selector2x0,5 mm²
- TX photocells2x0,5 mm²
- RX photocells4x0,5 mm²



TYPICAL INSTALLATION

Q.ty	Material description	Part number
1	SPIN 3C ENC barrier body with incorporated LYNX 06 control board	6130026
1	Foundation plate	58P1800
1	Rectangular beam 3000 mm	58P1802
1	Spring for SPIN 3	58F1812
1	Single-channel card receiver 433 MHz	6100110
1	Four-channels transmitter ECHO TX4 RC	6100334
1	GUARD 230V Flashing lamp	6100052
1	Pair of VEGA photocells	6100147
1	QUICK 1 Key-operated push-button for outdoor use	JA31101-15

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Material description	Part number
1	Pair of ORION photocells	JA310
1	Pair of columns for photocells	JA325
2	Foundation plate for column	JA328

ACCESSORIES

MOBILE SUPPORT KIT¹Code **6100279**RELEASE KEY
6 additional release keysCode **58P2081**SKIRT KIT
In painted aluminium.
Length 2m.Code **6100278**FIXED SUPPORT PLATE
For fixed support.Code **58P1808**FOUNDATION PLATE
WITH ACCESSORIESCode **58P1800**ARTICULATED BEAM
Articulation kit
For Spin 4Code **58P1810**FIXED SUPPORT KIT¹
For beam.Code **6100276**ENCODER KIT
Matchable with Lynx 06 control board.Code **6100260**RADIOFREQUENCY
MODULE
RQFZ 3PIN for GENIUS.
433 MHzCode **6100145**

868 MHz

Code **6100146**

1 - Available until stock lasts.



BEAMS FOR SPIN 3 - SPIN 4

Aluminium beam painted with white epoxy powders, complete with retro-reflecting stickers and rubber profile. Dimensions 90 x 25 mm.

Model	Length (m.)	Passage width (m.)	Code
Beam 3 m.*	3	2.66	58P1802
Beam 4 m.	4	3.66	58P1803
Beam 5 m.**	5	4.66	58P1818



SPRINGS FOR SPIN 3 - SPIN 4

Beam only (m.)	Articulated beam (m.)	Beam with foot (m.)	Beam with skirt (m.)	Spring thickness (mm.)	Code
2 - 2.7	2 - 2.7			4 - White	58F1811
2.7 - 3.4	2.7 - 3.4	2 - 2.7	2 - 2.7	4.5 - Red	58F1812
3.4 - 4	3.4 - 4	2.7 - 3.4	2.7 - 3.4	5 - Green	58F1813
4 - 4.6		3.4 - 4	3.4 - 4	5.5 - Yellow	58F1814
4.6 - 5		4 - 5	4 - 4.6	6 - Blue	58F1815
			4.6 - 5	6.5 - Grey	6100126



BEAMS FOR SPIN 6

Aluminium beam painted with white epoxy powders, complete with retro-reflecting stickers. Dimensions 100 x 50 mm.

Model	Length (m.)	Passage width (m.)	Code
Beam 5 m.**	5	4.62	58P1804
Beam 6 m.**	6	5.62	58P1805
Beam 7 m.**	7	6.62	58P1817




SPRINGS FOR SPIN 6

Beam only (m.)	Beam with foot (m.)	Beam with skirt (m.)	Round beam (m.)	Round beam in pieces (m.)	Spring thickness (mm.)	Code
4 - 4.8			4.3 - 4.9	4 - 4.6	6 - White	58F1816
4.8 - 5.5	4 - 4.8	4 - 4.8	4.9 - 5.6	4.6 - 5.4	6.5 - Red	58F1817
5.5 - 6.3	4.8 - 5.5	4.8 - 5.5	5.6 - 6.5	5.4 - 6.4	7 - Green	58F1818
6.3 - 7	5.5 - 6	5.5 - 6	6.5 - 7	6.4 - 7	8.5 - Yellow	6100024

* N.B. For the SPIN 3 model, beams with a length of over 3 m cannot be used.

** N.B. For Hold For Pickup shipments of beams of over 4m, please contact the shipping office.

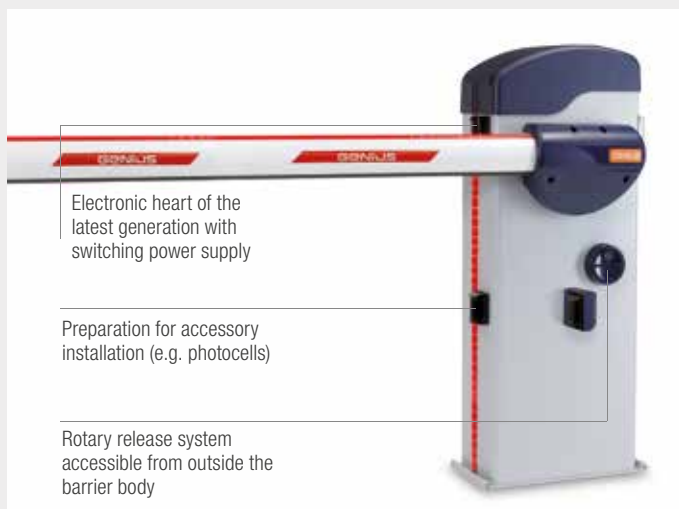

AUTOMATIC BARRIER FOR MOTOR VEHICLES

- Available version: 24V for passages up to 3, 5 and 7 m.
- The balance of the beam is automatic thanks to 1 or 2 springs.
- 7 m beam supplied in two parts together with a fixing joint.
- Lights for beam and barrier body.
- The control unit is housed in an ergonomic and easy-to-reach enclosure.
- Encoder for obstacle detection.
- User friendly rotary release system with customised key.
- Certified for continuous use (for more than 1.000.000 manoeuvres.)

Code	Name	Version	Voltage	Max. beam length
6130037	Rainbow Fast 324 C	Non-reversible FAST with encoder and integrated LYNX 07	24V	3 m.*
6130034	Rainbow 524 C	Non-reversible with encoder and integrated LYNX 07	24V	5 m.*
6130035	Rainbow 724 C	Non-reversible with encoder and integrated LYNX 08	24V	7 m.*

* Length indicated refers to the passage width, beam total length = passage width + 0.30 m approx.

OPERATOR DIMENSIONS



Technical Specifications	Rainbow Fast 324 C	Rainbow 524	Rainbow 724
Power supply (V)	230/115		
Electric motor (V)	24		
Max. power at thrust (W)	280		480
Nominal motor power (W)	160		220
Max. torque at 24Vdc (Nm)	155	140	370
Operating rated torque (Nm)	30	75	140
Opening/closing nominal time (sec) ¹	from 2 to 3	from 4 to 8	from 7 to 11
Frequency of use at 20 °C	continuous		
Operating ambient temperature (°C)	-20 +55		
Noise (dBA)	>70		
Protection class	IP54		
Operator weight (Kg)	66		72

CONTROL BOARDS


Lynx 07
Lynx 08

Page 74
Page 74

N.B.

¹ - Depending on the slow down setting.

ELECTRIC WIRING DIAGRAM

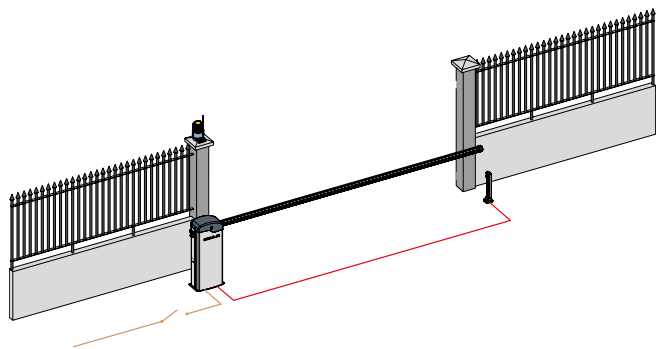


TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
1	RAINBOW FAST 324 C barrier body with incorporated LYNX 07 control board	6130037
1	Foundation Plate	6100294
1	Round Beam 3300 mm (passage width 3000 mm)	6100280
2	Spring for RAINBOW FAST 324 C	58F1812
1	RQFZ 868 MHz Module	6100146
1	Four-Channel Transmitter KILO TX2 JLC	6100332
1	24V GUARD Flashing Lamp	6100054
1	QUICK 1 key-operated selector for outdoor use	JA31101-15
1	Pair of ORION photocells	JA310
1	Column for photocell	JA325
1	Foundation plate for column	JA328

■ Line3x1,5 mm²

■ RX photocells4x0,5 mm²

ACCESSORIES



FOUNDATION PLATE
With tie-rods.

Code **6100294**



PHOTOCELL SUPPORT KIT

Code **6100295**



KIT FOR BEAM ARTICULATION
Length max. 4m.

Code **6100302**



SKIRT KIT
In painted aluminium.
Length 2m.

Code **6100278**



FIXED SUPPORT PLATE
For fixed support.

Code **58P1808**



STICKERS KIT
6 stickers with Genius brand.

Code **6100201**



BATTERY CABLE KIT
Cable to connect buffer batteries.

Code **6100300**



BEAM LIGHTS KIT
Beam lights connection.

Code **6100298**



BARRIER LIGHTS KIT
Barrier lights connection.

Code **6100299**



LIGHT TUBE
In pairing with beam lights kit.
12 meter pack

Code **6100296**



RADIOFREQUENCY MODULE
RQFZ 3PIN for GENIUS.
433 MHz

Code **6100145**



FIXED SUPPORT SCREW¹
For fixed support.

Code **6100277**



MOBILE SUPPORT KIT¹

Code **6100279**



FIXED SUPPORT KIT¹
For beam.

Code **6100276**



BATTERY KIT
With recharging board.

Code **6100144**

16,5 meter pack

Code **6100297**

868 MHz

Code **6100146**

¹ - Product available until the stock lasts.

ACCESSORIES FOR RAINBOW



BEAMS FOR RAINBOW FAST 324 C
profile with section Ø 75 mm

Model	Length (m)	Passage (m)	Code
Beam 3 m.	3.30	3.00	6100280



SPRINGS FOR RAINBOW FAST 324 C

Code	Description
58F1812	Spring – Red (L=400mm Ø 4.5mm)



SPRING CONFIGURATION FOR BEAMS - RAINBOW FAST 324 C

Beam only (m)	Beam with lights (m)	Q.ty Springs Ø 4.5mm Red - Code 58F1812
2,0 - 2,8	2,0 - 2,6	1
2,8 - 3,0	2,6 - 3,0	2

N.B. All the measures refer to passage width (total beam length = passage width + 0.30 m)



BEAMS FOR RAINBOW 524 C
profile with section Ø 75 mm

Model	Length (m)	Passage (m)	Code
Beam 3 m.	3.30	3.00	6100280
Beam 4 m.	4.30	4.00	6100281
Beam 5 m.	5.30	5.00	6100282



SPRINGS FOR RAINBOW 524 C

Code	Description
6100290	Spring Soft – Violet (L=400mm Ø 6mm)
6100291	Spring Strong - Black (L=400mm Ø 6.5mm)



SPRING CONFIGURATION FOR BEAMS - RAINBOW 524 C - Single beam

Beam only (m)	Beam with lights (m)	Beam with foot (m)*	Beam with lights and foot (m)*	Beam with skirt (m)**	Beam with lights and skirt (m)**	Q.ty Springs Ø 6 mm Code 6100290	Q.ty Springs Ø 6.5 mm Code 6100291
3,0 - 3,4	3,0 - 3,4	3,0 - 3,3	3,0 - 3,2	3,0 - 3,3		1	
3,4 - 4,3	3,4 - 4,2	3,3 - 3,7	3,2 - 3,6	3,3 - 3,7	3,0 - 3,6		1
4,3 - 4,8	4,2 - 4,7	3,7 - 4,4	3,6 - 4,4	3,7 - 4,4	3,6 - 4,4	2	
4,8 - 5,0	4,7 - 5,0	4,4 - 5,0	4,4 - 5,0	4,4 - 5,0	4,4 - 5,0		2

N.B. All the measures refer to passage width (length of the beam = passage width + 0.30 m).Foot fixed at beam end ** Skirt fixed at 0.30 m from beam end (Skirt length max.= passage -1.0 m)



BEAMS FOR RAINBOW 724 C
profile with elliptical section Ø 85/95 mm

Model	Length (m)	Passage (m)	Code
Beam 5 m.	5.30	5.00	6100283
Beam 4 m.	4.00		6100325
Beam 3.3 m.	3.30	7.00	6100326
Joint	-		6100327



SPRINGS FOR RAINBOW 724 C

Code	Description
6100292	Spring Soft – Violet (L=520mm Ø 7.5mm)
6100293	Spring Strong - Black (L=520mm Ø 8.5mm)



SPRING CONFIGURATION FOR BEAMS - RAINBOW 724 C - Single beam and/or parts

Beam only (m)	Beam with lights (m)	Beam with foot (m)*	Beam with lights and foot (m)*	Beam with skirt (m)**	Beam with lights and skirt (m)**	Q.ty Springs Ø 6 mm Code 6100292	Q.ty Springs Ø 6.5 mm Code 6100293
Single beam							
4,0 - 4,6	4,0 - 4,6	4,0 - 4,2	4,0 - 4,2	4,0 - 4,2	4,0 - 4,2	1	
4,6 - 5,0	4,6 - 5,0	4,2 - 5,0	4,2 - 4,8	4,2 - 5,0	4,2 - 4,8		1
			4,8 - 5,0		4,8 - 5,0	2	
Beam in parts with joint							
5,0 - 6,1	5,0 - 5,7	5,0 - 5,6	5,0 - 5,4	5,0 - 5,6	5,0 - 5,4	2	
6,1 - 7,0	5,7 - 7,0	5,6 - 6,5	5,4 - 6,5	5,6 - 6,5	5,4 - 6,5		2

N.B. All the measures refer to passage width (length of the beam = passage width + 0.38 m).Foot fixed at beam end ** Skirt fixed at 0.50 m from beam end (Skirt length max. = passage -1 m)



Control **boards**

Selection

GUIDE

Swing gates

230V

Brain 17	Page 68
Brain 592	Page 68

24V

Brain 15	Page 69
--------------------	---------

Sliding gates

400V

Geo 05	Page 73
------------------	---------

230V

Sprint 382	Page 69
Sprint 05	Page 70

24V

Sprint M24	Page 70
Sprint 11	Page 71

Up-and-over door

230V

Geo 07	Page 71
------------------	---------

24V

Geo 08	Page 72
Geo 09	Page 72

Rolling shutters

230V

Geo 13	Page 72
------------------	---------

Industrial sectional doors

400V

Geo 05	Page 73
------------------	---------

Barriers

230V

Lynx 06	Page 73
-------------------	---------

24V

Lynx 05	Page 74
Lynx 07	Page 74
Lynx 08	Page 74

Comparative table

APPLICATION TYPE	SWING GATES				SLIDING GATE
CONTROL BOARD	BRAIN592	BRAIN17	BRAIN15	SPRINT 382	
Motor power supply	230Vac	230Vac	24Vdc	230Vac	
Programming	microswitching	display and buttons	microswitching and buttons	display and buttons	
"Function Logics "automatic" (with closing after time out)	2	3	3	3	
Function Logics "semiautomatic"	3	3	3	3	
Function Logics "dead-man"	1	1	1	2	
Torque adjustment	independent for each motor (8 levels)	independent for each motor (50 levels)	✓	✓	
Learning cycle of opening and closing positions	programmable through learning button	programmable through learning button	programmable through learning button	thanks to limit switches	
Pause time programming	✓	✓	✓	✓	
Total opening input	✓	✓	✓	✓	
Total opening input/single leaf	✓	✓	✓	✓	
Stop input (movement time out)	✓	✓	✓	✓	
Safety contact in opening	✓	✓ (traditional and Bus G-Way)	✓ (Bus G-Way)	✓	
Safety contact in closing	✓	✓ (traditional and Bus G-Way)	✓ (Bus G-Way)	✓	
Fail-safe (photocells functioning test)	✓	✓	✓	✓	
Modifiable safeties in closing	✓	✓		✓	
Modifiable safeties in opening		✓		✓	
Electric lock output	✓	✓	✓		
Limit switches inputs opening/closing		✓		✓	
Safety edge input				✓	
Courtesy light output	✓	✓	✓	✓	
Flashing lamp output	✓	✓	✓	✓	
Reversing Stroke (to facilitate the electric lock unhook)	✓	✓	✓		
Ram stroke (to facilitate the lock hook)	✓	✓	✓		
Electronic deceleration	(through Timecoder encoder)	✓	✓	✓	
Electronic obstacle detection	✓	✓ (through absolute encoder PROcoder)	✓ (through virtual encoder ENV)	✓ (through encoder)	
Opening leaf deceleration function (to avoid leaves overlapping)	✓	✓	✓		
Closing leaf deceleration function (to avoid leaves overlapping)"	✓	✓	✓		
Pre-flashing (5 sec.) before movement		✓	✓	✓	
Diagnostic		✓	✓	✓	
Cycle count				✓	
Wind function			✓		
Soft-touch Function			✓		
Integrated receiver and decoding					
Integrated radio code decoding and connectors for RQFZ receiving modules with 3Pins		✓	✓		
Connector for plug in receivers with 5Pins	✓			✓	
BUS G-Way		✓	✓		
USB Connector		✓ (firmware updating, radio, codes back-up, installation configuration back-up)			

SLIDING GATE		UP-AND-OVER GATE		BARRIERS		
SPRINT M24	SPRINT05	SPRINT11	GEO 07	LYNX 06	LYNX 05	LYNX 07/08
24Vdc	230Vac	24Vdc	230Vac	230Vac	24Vdc	24Vdc
display and buttons	microswitching	microswitching	display and buttons	display and buttons	microswitching and buttons	display and buttons
3	3	2	1	3	3	3
3	3	2	1	2	3	3
1						
✓	✓	✓	✓	programmable through display and buttons	✓ (with trimmer)	self-learning
thanks to limit switches	thanks to limit switches	thanks to limit switches	thanks to limit switches	thanks to limit switches	programmable through learning button	programmable through learning button
✓	✓		✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓				
✓	✓	✓		✓	✓	✓
✓ (Bus G-way)	✓	✓ (in opening and closing)	✓	✓ (in opening and closing)	✓ (in opening and closing)	✓ (in opening and closing)
✓ (Bus G-way)	✓	✓	✓	✓	✓	✓
✓ (programmable output)			✓		✓	✓
✓			✓			✓
✓			✓			
✓	✓		✓	✓		✓
programmable inputs (2)						
✓		✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓ (adjustable)	✓	✓ (adjustable)
✓	✓ (through encoder)	✓ (through virtual encoder ENV)	✓ (through encoder)	✓ (adjustable)	✓	✓ (adjustable)
✓			✓			
✓			✓	✓		✓
				✓		✓
✓		✓		✓	✓	✓
	✓		✓			
✓						

Brain 17



Code

6100304



ENCLOSURE FOR
CONTROL BOARDS
230V

Code

JA320



G-WAY
BUS

Power supply (Vac)	230 (+6% -10%) – 50Hz
Absorbed power (W)	4 in Stand by
Max. motor load (W)	800
Accessories max. load (mA)	500
Electric lock max. load (VA)	15
Operating ambient temperature (°C)	-20 +55
Protection fuses	2
Function logics	Automatic/Semi-automatic/Safety/Semi-automatic B/ Dead man C/Semi-automatic "Step by step"/ Automatic "Step by step"
Opening / closing time	Programmable (from 0 to 120 sec.)
Pause time	from 0 to 9,5 min.
Closing leaf delay	from 0 to 1,3 min.
Opening leaf delay	2 sec. (can be excluded by display)
Thrust force	Adjustable via display on 50 levels for each motor
Terminal board inputs	Open/Open free leaf/Stop/Limit switch/USB Opening and closing safety devices/Power supply + earth/BUS G-WAY
Terminal board outputs	Flashing lamp/Motors/ 24 Vdc Accessories Power Supply/Failsafe/12Vac Electric Lock Power Supply/ Signalling lamp 24Vdc
Quick-fit connector	3PIN each RQFZ Genius receiving Module/Integrated decodification
Selectable functions	Logics and pause time/Thrust force/ Opening and closing leaf delay/Reversing thrust/ Failsafe/Closing safety device logic/Pre-flashing/ Use of Limit Switches/Use of Encoder PROcoder
Programming keys	Simple or Complete work times learning, with or without limit switches or encoder, with or without slow-downs and radio code programming
USB Input	Firmware Update/Upload and Download installation configuration/Upload and Download radio codes

Brain 592



Code

JA592



ENCLOSURE FOR
CONTROL BOARDS
230V

Code

JA320



Power supply (Vac)	230 (+6% -10%) – 50Hz
Absorbed power (W)	10
Max. motor load (W)	800
Accessories max. load (mA)	500
Electric lock max. load (VA)	15
Operating ambient temperature (°C)	-20 +55
Protection fuses	2
Function logics	Automatic/Semi-automatic/Safety/Semi-automatic B/ Dead Man C/Semi- automatic "Step by Step"
Opening / closing time	Programmable (from 0 to 120 sec.)
Pause time	0, 10, 20, 30, 60, 120 sec.
Closing leaf delay	0, 5, 10, 20 sec.
Opening leaf delay	2 sec. (can be excluded per dip-switch)
Thrust force	Adjustable per dip-switch on 8 levels for each motor
Terminal board inputs	Open/Open free leaf/Stop/Limit Switch/Opening and Closing Safety Devices/Power Supply + earth
Terminal board outputs	Flashing lamp/Motors/Accessories power supply 24Vdc/Failsafe/Electric lock 12Vac power supply
Quick-fit connector	Genius 5PIN receivers
Selectable functions	Logics and Pause times/ Thrust Force/ Opening and Closing Leaf Delay/ Reversing Thrust/ Failsafe/Closing Safety Device logic/ Pre-flashing
Programming key	Simple or Complete work times learning with or without limit switches or encoder, with or without slow-downs

Brain 15



- With transformer in waterproof enclosure.

Code
6100263



BATTERY KIT
With recharging board.



BUS INTERFACE BOARD
For traditional photocell connection.

Code **6100144**

Code **6100236**



G-WAY
BUS

ENV
PATENT

Power Supply (Vac)	230 (+6% -10%) – 50Hz
Central Power Supply (Vdc)	24 nominal
Absorbed power (W)	4
Max. motor load (W)	150 x 2
Accessories max. current (mA)	250
BUS accessories max. current (mA)	400
Operating ambient temperature (°C)	-20°C +55°C
Protection fuses	F1 = self-resetting; F2 = T2 A-250 V or T4 A-120 V
Function logics	Automatic/Automatic "Step by Step"/Semi-automatic/Semi-automatic "Step by Step"/Semi-automatic B/Dead man
Pause time	Variable depending on learning (max. 10 min.)
Terminal board inputs	Open A, Open B, Stop, BUS G-WAY (I/O)
Inputs in connector	Power supply/Battery/3 pin Radio module
Terminal board outputs	Motors/Flashing lamp/Accessory power supply/Electric lock/Service light contact (fixed 90 sec.)
Programmable functions	Logics/Speed/Anti-wind/Soft touch/Ram stroke
Learning functions	Pause time, 2nd closing leaf delay

CONTROL BOARDS FOR SLIDING GATES

Sprint 382



- Incorporated in Falcon M5 ENC, Falcon M8 C ENC, Falcon M14 C, Falcon M20 C, Blizzard 500 C ENC and Blizzard 900 C ENC gearmotors.

Code
JA382



Power supply (Vac)	230 (+6% -10%) – 50Hz
Absorbed power (W)	10
Max. motor load (W)	1000
Accessories max. load (mA)	500
Operating ambient temperature (°C)	-20 +55
Protection fuses	2
Function logics	Automatic/Automatic "Step by Step"/Semi-automatic/Safety/Semi-automatic B/Dead Man C/Semi-automatic "Step by Step"
Work time	Programmable (from 0 to 4 minutes)
Pause time	Programmable (from 0 to 4 minutes)
Thrust force	Adjustable on 50 levels
Terminal board inputs	Open/Partial open/Stop/Opening and Closing Safety Devices/Stop/Edge/Power Supply + earth
Inputs in connector	Limit switches in opening and closing/Encoder
Terminal board outputs	Flashing lamp/Motor/24 Vdc Accessories Power Supply/Signalling lamp 24Vdc/Failsafe
Quick-fit connector	Genius 5PIN receivers
Programming	3 keys (+, -, F) and display, simple or complete mode
Programmable functions Simple Mode	Function logics/Pause time/Thrust force/Gate direction
Programmable functions Complete Mode	Torque at start up/Braking/Failsafe/Pre-flashing/Indicator light/Safety device logic/Encoder/Slow-downs/Partial opening time/Work time/Assistance request/Cycles counter

Sprint M24



- Incorporated in Blizzard 400 C ENC and Blizzard 800 C ENC gearmotors.

Code

6020664



BATTERY KIT
With recharging board.

Code

6100144



24 V

Power supply (Vac)	230 (+6% -10%) – 50Hz
F1 fuse	2,5 A T
Accessories max. load (mA)	500
Flashing lamp	24Vdc - 15W
Operating ambient temperature (°C)	-20 +55
Function logics	Semi-automatic/Semi-automatic "Step by Step"/Automatic/Automatic "Step by Step"/Automatic Safety/Semiautomatic B/Dead Man
Work time	Programmable (from 0 to 9 min and 50 sec.)
Pause time	Programmable (from 0 to 9 min and 50 sec.)
Thrust force	Adjustable on 50 levels
Terminal board inputs	Open/Partial open/Stop/Power Supply voltage/Bus G-WAY
Terminal board outputs	Flashing lamp/Signalling lamp 24Vdc/Programmable output/Motor
Quick-fit connector	Battery/RQFZ radio-frequency module 3PIN receiver/Encoder
Programming	3 keys and display, simple or complete mode
Programmable functions Simple Mode	Operating logics/Pause time/Pushing force/Opening speed/Closing speed/Opening slow-down/Closing slow-down/Master-Slave
Programmable functions Complete Mode	Pre-flashing/Safety Logic/Partial Open/Working Time/Slow-down speed/Outputs/Partial Open Input and Stop (Safety edge)

Sprint 05



- Incorporated in Milord 5 C ENC and Milord 8 C ENC gearmotors

Code

6020312 spare



230 V

Power supply (Vac)	230 (+6% -10%) – 50Hz
Absorbed power (W)	15
Max. motor load (W)	600
Accessories max. load (mA)	500
Operating ambient temperature (°C)	-20 +55
Protection fuses	2 (Power supply and accessories)
Function logics	Automatic, Manual
Opening / closing time	120 sec.
Pause time	Four pre-set levels
Motor power	Trimmer-adjustable
Terminal board inputs	Open A/Open B/Stop/Opening limit switch/Closing limit switch/Photocells/Power supply
Terminal board outputs	Accessories power supply 24V/Flashing lamp/Motor
Quick-fit connector	Connector for plug in receivers with 5 Pins/Encoder/Limit switch/Capacitor
Programmable functions	Function logics/Pause time/Clutch sensitivity, Operation with encoder/Safety device logic/Condominium function

Sprint 11



- Incorporated in Milord 424 ENV and Milord 824 ENV gearmotors

Code

6020548 spare



G-WAY
BUS

ENV
PATENT

Power supply (Vac)	230
Absorbed power (W)	3
Max. power at initial thrust (W)	120
Accessories max. load (mA)	500
Operating ambient temperature (°C)	-20 +55
Function logics	Automatic/Automatic "Step by Step"/Semi-automatic/Semi-automatic "Step by Step"
Pause time	Through self-learning during programming
Motor power	Trimmer-adjustable
Terminal board connections	Open A/Open B/Stop/Opening and closing limit switches/Photocells/Flashing lamp/Motor/External batteries
Inputs with connector	RQFZ radio-frequency module 3PIN connector/Battery charger
Programmable functions	Automatic re-closing/Open A input/Photocells logic/Reversing during closing/Slow-down percentage/Deceleration speed



BATTERY KIT
With recharging board.

Code

6100144

CONTROL BOARDS FOR UP-AND-OVER DOORS

Geo 07



- Incorporated in Eurobreeze 06 C and Eurobreeze 06 C Slow gearmotors

Code

6100151



Power supply (Vac)	230 (+6% -10%) – 50Hz
Max. absorbed power (W)	12
Max. motor load (W)	800
Accessories max. load (mA)	300
Operating ambient temperature (°C)	-20 +55
Circuit protection fuses	Network/accessories
Function logics	Automatic/semi-automatic
Work time	Programmable from 0 to 59 sec. (default 20 sec.)
Pause time	Programmable from 0 to 4 min. (default 2 min.)
Electronic clutch	Programmable on 50 levels
Limit switch tripping mode	4 operation types
Terminal board inputs	Open/Encoder/Opening and closing safety devices/Opening and closing flashing lamp 230Vac - 60W
Quick-fit connector	5 pin radio receiver
Terminal board outputs	Motor/230Vac external courtesy lamp/24Vdc Accessories power supply
Incorporated courtesy lamp max. load (W)	25
External courtesy lamp max. load (W)	250

N.B. For Eurobreeze 06 operators, compulsory encoder with limit switch code. 6100162.
For previous versions, use spare part GEO 668 code. JA668.

Geo 13



Code

6100306



Power supply (Vac)	230 (+6% -10%) – 50Hz
Absorbed power (W)	7
Max. motor load (W)	1300
Accessories max. load (mA)	500
Operating ambient temperature (°C)	-20 + 50
Protection fuses	2 (Power supply and accessories)
Function logics	Step by step/Automatic
Work time (Opening/Closing)	Min. 8 sec. max. 90 sec., trimmer-adjustable
Pause time	7 pause times selectable per dip-switch
Terminal board inputs	Mains power supply/Open/Stop/Obstacle detection
Quick-fit connector	5 pin connector for receiver board
Terminal board outputs	Motor power supply/Flashing lamp power supply/Accessories power supply



ENCLOSURE FOR GEO 13 CONTROL BOARDS

Protection class IP44
Dimensions: 185 x 185 x 100 mm.

Code

6100140

CONTROL BOARDS FOR CEILING OPERATORS

Geo 08



- Incorporated in Zodiac 60 gearmotor

Code

6020444



Power supply (Vac)	230
Accessories power supply (Vdc)	24
Accessories max. load (mA)	200
Terminal board connections	Open - Stop - Safety devices - Fail Safe - Flashing lamp LEDDY
Inputs with connector	Motor and Encoder Connector/Radio-frequency module RQFR Genius 3PIN/ Battery charger
Function logics	Automatic/Semi-automatic



BATTERY KIT
With recharging board.

Code **6100144**



LEDY
24 Vdc with integrated flashing.

Code **6100190**



RADIOFREQUENCY MODULE
RQFZ 3PIN for GENIUS.
433 MHz

Code **6100145**

868 MHz

Code **6100146**

Geo 09



- Incorporated in Zodiac 100 gearmotor

Code

6020445

Geo 05



- 400V 3Ph control board for all GENIUS motors at 400V 3Ph.
- Mercury 3Ph, Mercury V3Ph, Falcon 20 3Ph, Industrial Slider

Code

6100116



400 V

Power supply (Vac)	230 3Ph +N (+6% -10%) 50Hz 400 3Ph (+6% -10%) 50Hz
Max. motor load (W)	1300
Accessories output (mA)	24 Vdc 500 mA max.
Operating ambient temperature (°C)	35
Indicator light power supply	24 V (5W max.)
Four protection fuses	6.3 A per each phase / 1.6 A accessories
Safety timer	255 sec.
Inputs	Open/Partial Open/Stop/Closing safety devices/Limit switch
Outputs	Indicator lamp/Flashing lamp/Motor/Accessories power supply 24Vdc
Programming	Automatic, semi-automatic function logics
	and dead man/two safety device logics
	Selectable pause time from 5 to 180 sec./
	Selectable 5 sec. pre-flashing



ENCLOSURE FOR GEO 05 CONTROL BOARD
Protection class IP54 (IP55 with the use of cable glands).
Dimensions: 265 x 204 x 85 mm.

Code

6100124

CONTROL BOARDS FOR BARRIERS

Lynx 06



- Incorporated in Spin 3 C, Spin 4 C and Spin 6 C barriers

Code

6100240



230 V

Power supply (Vac)	230 (+6% -10%) – 50Hz
Absorbed power (W)	3
Motor absorbed power (W)	500
Accessories max. load (mA)	500
Power supply and flashing lamp max. load	230 Vac 25 W
Power supply and max. load of barrier status indicator lamp	24 Vdc 5 W
Operating ambient temperature (°C)	-20 +55
Protection fuses	F1= T5A (transformer primary winding and motor) F2= T500mA (accessories and indicator lamp)
Function logics	Automatic/Automatic step by step/Semi-automatic/Semi-automatic step by step/Condominium
Opening / closing time	In self-learning mode during first manoeuvre
Pause time	Nine levels selectable up to a maximum of 4 minutes
Motor power	Adjustable on several levels
Slow-down time	Three selectable levels
Obstacle detection	With encoder
Selectable functions	Operates with or without encoder/Encoder sensitivity/Automatic re-closure/ Open input operation/Condominium function/Slow-down percentage/ Heating function/Immediate closure/Timer function/Soft start/Photocells operation/Maintenance request
Terminal board inputs	Opening/Closing/Photocells/Opening limit switches/Closing limit switches/ Stop/Mains power supply/Earthing
Inputs with connector	Radio module/Thrust capacitor/Encoder
Terminal board outputs	Accessories power supply/Flashing lamp/Motor/Indicator light



ENCLOSURE FOR 230V CONTROL BOARDS

Code

JA320

N.B. To combine with encoder kit for SPIN ENC - 6100260

Lynx 05



- Incorporated in Simple C barrier

Code
6020456



Voltage and frequency	230 Vac 50 Hz / 115 Vac 60 Hz
Absorbed power (W)	3
Accessories max. load (mA)	500
Operating ambient temperature (°C)	-20 +55
Function logics	Automatic (A) / Manual (E) / Condominium (D)
Opening/Closing max. time	In self-learning mode during programming
Pause time	In self-learning mode during programming
Obstacle detection	Trimmer adjustable
Selectable functions	Automatic logic/Condominium logic/Manual logic/Open command function/Case of a power cut selection/Selection of flashing lamps/Selection of safety device also active during opening
Terminal board inputs	Power supply 22 Vac / Earth / Close / Open / Open - Close / Stop / Safety devices
Quick-fit connector	3 pin Molex connection for encoder / 3 pin input for receiver module
Terminal board outputs	Accessories power supply 24Vdc/Beam lights/Indicator lights/Flashing lamp/Failsafe
Board dimensions (mm)	168 x 176

Lynx 07



- Incorporated in Rainbow Fast 324 C and Rainbow 524 C barriers

Code
6020560



Voltage and frequency	230 Vac 50 Hz / 115 Vac 60 Hz
Absorbed power (W)	5
Max. power at thrust (W)	280
Accessories max. load (mA)	500
Operating ambient temperature (°C)	-20 +55
Protection fuses	2 fuses, replaceable + 4 fuses, self-resetting
Function logics	Automatic (A) / Automatic step by step (AP) / Manual (E) / Manual step by step (EP) / Condominium (D)
Opening/Closing max. time (sec)	60
Pause time	Adjustable on 7 levels of 5 seconds up to 4 minutes
Encoder sensitivity	Adjustable on four levels
Terminal board inputs	Mains power supply (230/115 Vac)/FCA and FCC limit switches/Photocells/Stop/Open-Close/Open/Close/Failsafe/Batteries
Quick-fit connector	3 pin Molex connection for encoder/3 pin input for receiver module
Terminal board outputs	Motor power supply 24 Vdc/Flashing lamp 24 Vdc/24 Vdc indicator lamp max. 5 W/Beam lights 24Vdc/Synchronisation for opposing barriers/Accessories power supply/Battery charger
Board dimensions (mm)	168 x 146

Lynx 08



- For Rainbow 724 C
- Incorporated in Rainbow 724 C barrier

Code
6020561

Voltage and frequency	230 Vac 50 Hz / 115 Vac 60 Hz
Absorbed power (W)	5
Max. power at thrust (W)	480
Accessories max. load (mA)	500
Operating ambient temperature (°C)	-20 +55
Protection fuses	2 fuses, replaceable + 4 fuses, self-resetting
Function logics	Automatic (A) / Automatic step by step (AP) / Manual (E) / Manual step by step (EP) / Condominium (D)
Opening/Closing max. time (sec)	60
Pause time	Adjustable on 7 levels of 5 seconds up to 4 minutes
Encoder sensitivity	Adjustable on four levels
Terminal board inputs	Mains power supply (230/115 Vac) / Limit switch FCA e FCC / Photocells / Stop / Open-Close / Open / Close / Failsafe / Batteries
Quick-fit connector	3 pin Molex connection for encoder / 3 pin input for receiver module
Terminal board outputs	Motor power supply 24 Vdc/Flashing lamp 24 Vdc/24 Vdc indicator lamp max. 5 W/Beam lights 24Vdc/Synchronisation for opposing barriers/Accessories power supply/Battery charger
Board dimensions (mm)	168 x 176



Accessories

Selection

GUIDE

Accessories

Safety devices

Vega - Vega Bus	Page 78
Vega Wireless	Page 78
Orion	Page 78
Optical edge	Page 80
Guard	Page 81
Edge SE 55	Page 80
Control unit	Page 80
Wire edge	Page 81

Control devices

Quick 1	Page 82
Quick 2	Page 82
Amicode.	Page 83
Keypad	Page 83
Decoding board	Page 83
Armo	Page 82

Radio controls and receivers

Kilo TX2 868.	Page 84
Kilo TX4 868.	Page 84
Kilo TX2 433.	Page 85
Kilo TX4 433.	Page 85
Echo TX4 433	Page 86

Various accessories

RMG.	Page 87
Electric lock	Page 87
On-ground striker	Page 87
Leaf block	Page 87

Vega - Vega Bus



Vega

Code
6100147

Vega Bus

Code
6100148

G-WAY
BUS

Self-aligning, outdoor photocells in traditional technology 24Vac/Vdc and/or BUS (G-WAY), extremely compact consisting of a transmitter and a receiver with modulated infra-red rays. Its compact size enables easy positioning in little space. Conformity to the EN12453 European standard - Type D, Category 3

Vega

Power supply	24Vac/Vdc
Absorbed power for torque	50mA
Nominal range	20 m
Automatic	Alignment

Vega Bus

Absorbed power for torque	20mA
Nominal range	15 m
Automatic	Alignment
Self-alignment angle	+/- 7° (m 15) +/- 13.5° (m 5)

Vega Wireless



Batteries not included

Code
6100248

Self-aligning, outdoor photocells in traditional technology 24Vac/Vdc and/or BUS (G-WAY), extremely compact consisting of a transmitter and a receiver with modulated infra-red rays. Its compact size enables easy positioning in little space. Conformity to the EN12453 European standard - Type D, Category 3

Power supply	12 - 24 Vac/Vdc
Max. range	15 m
Automatic	Alignment
RX absorbed power	30 mA
TX absorbed power	40 µA, Battery - 5 mA, 24 Vdc
3V CR2 TX battery duration and type	2 to 3 years ¹

¹ - Battery duration can vary depending on the used battery charge, its type and environment/installation conditions.

Orion



Code
JA310

Directional, outdoor photocells with aligning facility and modulated infra-red rays. Professional and recommended for long distances. Highly versatile, it can also replace an embedded photocell, covering any hole in the pilaster, and enabling quick installation. Conformity to the EN12453 European standard - Type D, Category 3

Power supply	24Vdc (19÷35 Vdc)
Absorbed power	TX 20mA – RX 30mA
Nominal range	30 m
Detection angle	+/- 4°
Type of contacts	NO/NC

ACCESSORIES FOR ORION



FIXING PLATE
Side embossed plate.
1 pair

Code **JA331**



BUS INTERFACE BOARD
For traditional photocell connection.

Code **6100236**



COLUMNS
For photocells.
Package 2 pcs.
H 50 cm.

Code **JA325**



COLUMN
For photocells.
Package 2 pcs.
H 100 cm.

Code **JA326**



FOUNDATION PLATE
For column.

Code **JA328**

H 100 cm.
For double application.

Code **JA327**

ACCESSORIES FOR VEGA



COLUMN
For photocells.
Package 2 pcs.
H 50 cm.


Code **6100149**



FOUNDATION PLATE
For column.

Code **6100150**


Optical edge

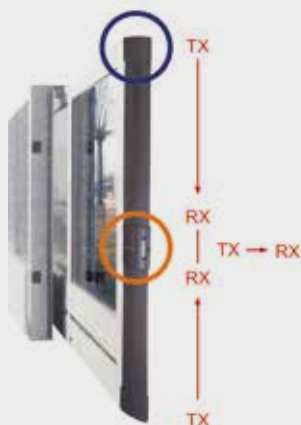

- Maximum safety guaranteed by double functionality, safety edge and photocell. The optical edge consists of:
- Rubber profile, height 110 mm, with aluminium support.
- Obstacle detection by infra-red rays and battery powered modules.
- Double functionality, safety edge and photocell, plus LED signalling battery and operating status.
- Operating ambient temperature -20°C +55°C.

Safety device of C type (EN12453) certified as category 2, EN12978 standard.

Code	Description
6100157	Rubber profile Optical edge H m. 2.50
6100158	Electronic units for Optical edge
6100159	Counter-profile for optical edge H m 2.50 (C)
6100161	Adjustable wall support for optical receiver (D)

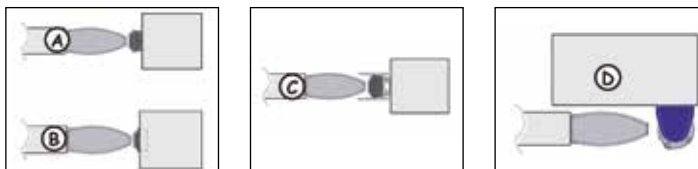

The gate and the pillar are on the same axis (Ref. A-B-C):

- The receiver is directly fitted on the pillar without any accessory, to wall (Ref. A) or embedded (Ref. B).
- The receiver is fitted inside the coupling profile (Ref. C).

The gate and the pillar are not on the same axis (Ref. D):

- The receiver is fitted on the adjustable support (Ref. D).

Edge "SE55"



- Plug and Play "SE" safety edge and sensitive element in **conductive rubber**
- **Quick, easy and customized assembly thanks to the quick terminals with butyl resin**
- Rubber profile, height 55 mm, with aluminium support
- Obstacle detection, angles of +/-45°
- Protection class IP65
- Operating temperature -20°C +55°C

Safety device of C type (EN 12453) certified as category 2, EN 12978 standard

Supplied in customized key for edges at 2.5m:

Code	Q.ty	Description
6100339	1	Rubber profile SE 55, 2.5m
	1	Terminal with XSP R8.2 resistor
	1	Terminal with XSP C0.5 cable
	1	Aluminium profile, 2.5m

Control unit



- Control unit for safety edge "E", with facility for controlling up to two series consisting of four in-parallel edges.
- Number of edges selected through dip-switches.
- Signalling LED.
- DIN bar fitting.
- IP20 Protection class.
- Operating ambient temperature -20°C +55°C.

Code	Package
6100042	1

Wire edge



- H. 60 mm, assembled, complete with terminal plug, securing profile in aluminium and safety microswitchings. Auxiliary safety device.

Length 1700 mm.

Length 2000 mm.

Code **A13017**

Code **A13020**

Guard



Guard is a new flashing lamp designed for installation in a host of configurations, enabling maximum vertical/horizontal positioning flexibility on pillars or walls. The outdoor support for installing the antenna cuts down on installation time and integrates all elements in a single product. Available in different versions 115/230V 12/24V, with fixed light (flashing managed by the control board) or intermittent light (flashing circuit in the flashing lamp).

Code	Description
6100052	Guard 230Vac 40W (intermittent)
6100054	Guard 24Vdc 15W (fixed light)
6100315	Guard LED 230Vac
6100316	Guard LED 24Vac

CONTROL DEVICES

Quick 1



Outdoor key-operated selector switch, one contact in NO/NC exchange, anti-break-in.

Code*	Package
JA31101 - 15	1

*(a different key number corresponds to each code).

Quick 2



Outdoor key-operated selector switch, two contacts in NO/NC exchange, anti-break-in.

Code*	Package
JA31301 - 15	1

*(a different key number corresponds to each code).

ACCESSORIES FOR QUICK



COLUMN
For photocells.
Package 2 pcs.
H 100 cm.

Code **JA326**



FOUNDATION PLATE
For column.

Code **JA328**



FIXING PLATE
Side embossed plate.
1 pair

Code **JA331**

Armo selector



Anti-break in key-operated selector with release device and control push button.

Code	Name
6100220	Armo 230V selector
6100221	Armo 24V selector

ACCESSORIES FOR ARMO



LOCK
Cylindrical lock for ARMO no.
1-10

Code **610025701-10**

Amicode



External keypad 868 MHz, anti break-in, for radio connection.

Code	Name
6100097	Amicode 868 MHz
Power supply	9V - alkaline battery
Coding type	Encrypted rolling code for self-learning
Keyboard	Backlit keypad with LEDs
Controls	<ul style="list-style-type: none"> • 3 commands protected by a 5-digit access code • 1 direct command for additional services
Button pressure	With acoustic signal

Keypad



12-key keypad for outdoor use, anti break-in, in aluminium with painted steel cover.

Code	Name
JA108	Keypad

Decoding board



Decoding BOARD for digital keypad, two-channels, up to 4 keypads can be connected.

Code	Name
A10801	Decoding board

TRANSMITTERS

Kilo TX2



868MHz JLC SYSTEM

- The type of decoding is Rolling Code with Self-learning (**JLC** = Jumping Learning Code). The code generated by a complex algorithm is always different for every activation and synchronised with the data awaited by the receiver.
- The transmitter's code can be doubled on other transmitters thanks to the self-learning PATENTED technology (from transmitter to transmitter with no need to manage the receiver)

Kilo TX4



868Mhz Two-channel and Four-channel transmitters.

Code	Description	Model	Package
6100332	Two-channels	Kilo TX2	1

Code	Description	Model	Package
6100333	Four-channels	Kilo TX4	1

RECEIVERS



- Plug-in Receivers with 5pins molex connector compatible with Genius control boards including 5pins Plug-ins.

Code	Description	Package
JA335	868 JLC one-channel Receiver	1

Code	Description	Package
6100075	868 JLC Two-channels Receiver	1



- RQFZ frequency Module with 3pins Plug-in connector, compatible with Genius control boards including integrated radio signal decoding and 3pins connector.

Code	Description	Package
6100146	868 RQFZ Module	1



- Outdoor two-channel and four-channel receivers, with cable connection, 12-24 Vac Vdc power supply, including integrated radio signal decoding. Suitable for fixing on DIN rail.

Code	Description	Package
6100229	INTERMOD02 868MHz Receiver	1

Code	Description	Package
6100230	INTERMOD04 868MHz Receiver	1

ACCESSORIES FOR TRANSMITTERS/RECEIVERS



ANTENNA
868MHz tuned antenna including securing bracket and 5m coaxial cable for outdoor installation or on GUARD lamp.



Interface Board
Interface Board including 5 pins box, for outdoor application. Power Supply 24Vac/Vdc.



Interface Board
Set of 6 Interface boards for 5pin-receivers

Code **JA337**

Code **JA339**

Code **6020028**

TRANSMITTERS

Kilo TX2



433MHz JLC SYSTEM

- The type of decoding is Rolling Code with Self-learning (**JLC** = Jumping Learning Code). The code generated by a complex algorithm is always different for every activation and synchronised with the data awaited by the receiver.
- The transmitter's code can be doubled on other transmitters thanks to the Self-learning **PATENTED** technology (from transmitter to transmitter with no need to manage the receiver).

Kilo TX4



433MHz Two-channel and Four-channel transmitters.

Code	Description	Model	Package
6100330	Two-channels	Kilo TX2	1

Code	Description	Model	Package
6100331	Four-channels	Kilo TX4	1

RECEIVERS



- Plug-in Receivers with 5pins molex connector compatible with Genius control boards including 5pins Plug-ins.

Code	Description	Package
6100323	433 JLC one-channel Receiver	1



- RQFZ frequency Module with 3pins Plug-in connector, compatible with Genius control boards including integrated radio signal decoding and 3pins connector.

Code	Description	Package
6100145	433 RQFZ Module	1



- Outdoor two-channel and four-channel receivers, with cable connection, 12-24 Vac Vdc power supply, including integrated radio signal decoding. Suitable for fixing on DIN rail.

Code	Description	Package
6100237	INTERMOD02 433Mhz Receiver	1

Code	Description	Package
6100238	INTERMOD04 433Mhz Receiver	1

ACCESSORIES FOR TRANSMITTERS/RECEIVERS



ANTENNA
433Mhz tuned antenna including securing bracket and 5m coaxial cable for outdoor installation or on GUARD lamp.



Interface Board
Interface Board including 5 pins box, for outdoor application. Power Supply 24Vac/Vdc.



Interface Board
Set of 6 Interface boards for 5pin-receivers

Code **6100012**

Code **JA339**

Code **6020028**

TRANSMITTERS

Echo TX4



RC 433MHz SYSTEM

- The type of decoding is RC = Rolling Code.
- The RC is a dynamic coding system, i.e. the code is always different for every activation and synchronised with the data awaited by the receiver.

433MHz four-channel transmitters.

Code	Description	Model	Package
6100334	Four-channels	ECHO TX4	1

RECEIVERS



- Plug-in Receivers with 5pins molex connector compatible with Genius control boards including 5pins Plug-ins.

Code	Description	Package
6100110	RC 433 one-channel Receiver	1

Code	Description	Package
6100099	Two-channel Receiver 433 RC	1



- RQFZ frequency Module with 3pins Plug-in connector, compatible with Genius control boards including integrated radio signal decoding and 3pins connector.

Code	Description	Package
6100145	433 RQFZ Module	1



- Outdoor two-channel and four-channel receivers, with cable connection, 12-24 Vac Vdc power supply, including integrated radio signal decoding. Suitable for fixing on DIN rail.

Code	Description	Package
6100237	INTERMOD02 433Mhz Receiver	1

Code	Description	Package
6100238	INTERMOD04 433Mhz Receiver	1

ACCESSORIES FOR TRANSMITTERS/RECEIVERS



ANTENNA
433Mhz tuned antenna including securing bracket and 5m coaxial cable for outdoor installation or on GUARD lamp.

Code **6100012**



Interface Board
Interface Board including 5 pins box, for outdoor application. Power Supply 24Vac/Vdc.

Code **JA339**



Interface Board
Set of 6 Interface boards for 5pin-receivers

Code **6020028**



RMG 1



Magnetic detector.

RMG 1 -One-channel

Code
6100131

Inductive vehicle detection system, with single or double channel, high performance, installed in a compact housing with connections by a standard round 11 PIN industrial connector.

The system's tripping sensitivity can be adjusted to adapt to any type of vehicle.

- Automatic frequency tuning.
- The oscillation frequency of each loop is controlled and measured at power-up.
- Four frequency settings.
- Continuous updating of work frequency.
- Loop interruption or short-circuit signalled.
- Multi-function signalling LED.
- Adjustment by potentiometers.
- Application on DIN guide.

Power supply (Vac/Vdc)	12 - 24
Absorbed power (W)	< 2.5
Operating ambient temperature	-30°C + 70 °C
Loop inductivity (µH)	20 – 1000
Frequency range (kHz)	20 - 130 kHz on 2 levels
Tripping sensitivity	from 0.005% to 0.5% (Δ/f) in 250 stages
Reaction time	25 ms
Presence time	from 1 min. to infinity in 250 stages
Loop power cable (m)	< 100
Relay contacts max. capacity	230 Vac – 5A (resistive)
Pulse duration (ms)	100 or 500
Dimensions (mm)	77 x 40 x 75 (h)
Loops managed	1

N.B.

Magnetic detectors must be installed in suitable boxes

Use a single-pole 1.5 mm² diameter cable for the loop.

The loop must be at least 15 cm away from metal objects, and at a depth of max. 5 cm from the definitive paving surface.

RMG 2



Magnetic detector.

RMG 2 - Two-channels

Code
6100132

Electric lock



- 12Vac power supply both hands, complete with counter opening, internal/external cylinders and 3 keys.

Code	Package
6100011	1

On-ground striker



- On-ground striker for electric lock.

Code
6100016

Leaf block



- Both hands.

Code
JA162

GENERAL CONDITIONS OF SALE

1. Notwithstanding any provision to the contrary and even if any such provision may be contained in any possible general conditions of the Buyer, these general conditions of sale (hereinafter the "Conditions") shall apply to all contracts of sale which are made in Italy and/or abroad by FAAC S.p.A. Soc. Unipersonale or by other companies and branches owned and/or controlled by FAAC S.p.A. Soc. Unipersonale (hereinafter "FAAC"), which concern the products manufactured and/or marked by FAAC (hereinafter the "Products"). All offers, all acceptances of orders and all deliveries by FAAC shall be deemed to have been made pursuant to the following Conditions, except as otherwise expressly provided in writing by FAAC.

2. The contract of sale shall be deemed to be entered into at the moment in which the Buyer becomes aware of FAAC's acceptance of the Buyer's order proposal, or in the absence of said occurrence, at the time of delivery of the Products to the Buyer. Orders may be accepted only if duly signed by the Buyer and provided that said orders contain the technical data necessary to identify the specifications of the Product ordered, it being understood that FAAC shall, at its sole discretion, be entitled to accept or refuse the orders. Any possible cancellations of or modifications to any order by the Buyer shall not be effective, unless previously authorized and subsequently accepted in writing by FAAC. It is agreed that the execution of the contract of sale shall be deemed to have taken place at FAAC's place of business in Zola Predosa (Bologna, Italy).

3. All delivery dates given shall be deemed as indicative only and non-binding. FAAC shall use reasonable endeavors to effect delivery within 30 (thirty) working days from the date of the order confirmation by FAAC. In any event of late delivery, the Buyer shall not be entitled to cancel the order or to any compensation for damages of whatever nature. The Buyer, by collecting any Products which may have been delivered late, waives any and all rights in relation to said delay.

4. Unless otherwise agreed in writing between FAAC and the Buyer the Products shall be delivered "FCA" (in accordance to the most recent edition of the ICC's Incoterms). FAAC shall not enter into any shipment or transportation agreement and shall not insure the Products, unless the Buyer should so expressly instruct FAAC in writing, it being in any event understood that any and all risk and expenses in relation thereto shall be borne exclusively by the Buyer. The buyer agrees promptly to collect the Products as soon as receives notice that the products are ready and at its disposal and, in any event, within eight days of the date of said notice. In any event, the transfer of risk and the payment terms shall run as of the date of the notice that the Products are ready or, in the absence thereof, as of the date of delivery. Standard packing of the Products suitable for air, surface and sea transportation in container will be provided by FAAC free of charge. If Buyer requires any special packing, the full cost to FAAC of said special packing shall be invoiced to the Buyer.

5. FAAC shall be entitled to make minor changes to the Product, without being obliged to inform the Buyer. The quality and quantity of the Product which FAAC undertakes to supply are those specified in the order confirmation, or failing which, as specified in the invoice at the time of delivery of the Products by FAAC. A tolerance of up to +/- 10% (ten percent) in respect of quantity will be allowed in relation to each of the Product. FAAC does not represent or warrant to the Buyer that the Products comply with the applicable laws and regulations in force in the Country (IES) where the Buyer is established or where the Products have to be sold, delivered and/or installed. FAAC shall have no obligation to modify the Product in compliance with said laws or regulations and the Buyer shall be solely responsible for ensuring that the Product and any services of the Buyer conform to the applicable technical and safety standards, laws and regulations in force inside country (IES).

6. Title to the Products shall pass to the Buyer only upon payment in full of the sale price of the Products. In the event of default by the Buyer, FAAC shall be entitled, without any formalities, including notice of default, to repossess all of the Products with respect to which title has not yet passed to the Buyer, wherever said Products may be; in addition, FAAC reserves the right to seek any other judicial remedies available to it in respect of the damages suffered.

7. Unless otherwise agreed in writing, the list prices of FAAC which are in force as of the date of confirmation of each Product's order shall apply to said order. The prices of any non-standard Products or any Products not appearing on the price list shall be determined by FAAC on a case by case basis. FAAC reserves the right to change the prices of the Products and/or the discounts, if any, applicable thereto at any time and for any reason, upon 30 (thirty) days' prior written notice to the Buyer. If the price list is quoted by FAAC in a currency other than EURO, then FAAC may alter the price of the Products at any time, without any notice to the Buyer, to compensate possible fluctuations in the exchange rate between EURO and the currency in which the prices are quoted. If any delay in delivery of the Products occurs through the fault of the Buyer, any possible increase in the price of the Products which may have occurred since the confirmation of the order relating to the Products shall be borne solely by the Buyer. Except as otherwise agreed in writing, payment for all Products shall be effected by means of:

- An irrevocable letter of credit ("L/C"), confirmed by a primary Italian bank, in compliance with publication 500 of the International Chamber of Commerce as updated from time to time, and valid for at least 30 days from the anticipated date of final delivery. Or in alternative:
- Bank wire transfer with full amount covered by stand by L/C, subject to U.C.P. 1993, confirmed by a primary Italian Bank, in compliance with publication 500 of the International Chamber of Commerce as updated from time to time, and expiring date at least 180 days from the date of final delivery. Delivery of the Products is conditional upon the issuing of the above L/C's or the payment of the price by any other means which may have otherwise been authorized in writing by FAAC. Regardless of the means of payment agreed upon, it is understood that payments shall be deemed to have been effected at FAAC's place of business.

8. Under no circumstances shall the Buyer be entitled to suspend or delay payment of the Products or raise any claims in relation thereto until full payment therefore has been made. In the event of late payment, FAAC shall be entitled to exercise its rights provided under the laws in force in Italy in relation to late payment in commercial transactions, without prejudice to its rights to seek any further damages. In any event, FAAC may (i) terminate the contract in relation to the Products not yet delivered and/or (ii) delay the carrying out of any order in hand, inter alia, by suspending delivery of the Products until such time as all outstanding debts owed by the Buyer to FAAC have been paid.

9. FAAC shall be entitled to suspend and/or terminate the sale contract at any time, at its sole discretion, or withdraw any more favorable terms of payments which may have been granted in respect to any order, in the event of any change in the Buyer's solvency and/or liquidity without prejudice to FAAC's right to compensation for damages.

10. Any and all taxes, duties, levies, licenses, authorizations, permits and any and all tax and administrative formalities relating to the importation and/or resale of the Products shall be borne and carried out exclusively by the Buyer or, alternatively, they may be carried out by FAAC at the Buyer's sole risk, expense and responsibility.

11. FAAC warrants and guarantees to the buyer that all new Products shall be free under normal use and service from manufacturing defects for a period of 24 months from the date of installation of the Products or 30 months from the manufacturing date (as shown on the tag plate of each Product), when available (the "Warranty Period"). The buyer acknowledges and agrees that FAAC's warranty is expressly limited to manufacturing defects and that said warranty shall not extend to any damage to the products resulting from other causes, including, without limitation, misuse, transportation or faulty installation thereof, the maximum liability of FAAC to the buyer or to any other person or entity, arising out of or in connection with the products and based on a claim of breach or repudiation of warranty, shall in no case exceed the price paid to FAAC for the product(s) in question. Should FAAC be in breach of its representation and warranty under this art. 11, FAAC's entire liability and the buyer's exclusive remedy shall be, the repair or replacement of the defective part Product free of charge, at FAAC's own workshop. The buyer shall send, free of charge, the part to be repaired or replaced and FAAC shall examine said part to determine whether it is defective and whether the manufacturer is responsible for the defect; in which case only FAAC shall repair or replace the part, in its sole discretion, and shall send the repaired or replacement part to the buyer, who shall bear the cost of transportation only. Any Products which may have been returned without FAAC's authorization shall not entitle the Buyer to any credit notes nor reimbursement. In any event any and or risk and expenses relating to the return of the Products shall be born exclusively by the Buyer. Any claims relating to the defects must be sent to FAAC by registered letter with return receipt requested within eight day following the date of delivery in the case of patent defects and eight days following the date of discovery in the case of latent defects and in any event, within the Warranty Period failing which the Buyer shall lose all right to bring any claim in relations the thereto. The non-consumer purchaser waives its right of recourse against FAAC under art. 1519 quinquies of the Italian Civil Code. Any and all further or other warranties, be they expressed or implied including without limitation, any warranties provided by law shall be deemed excluded and superseded by these conditions. FAAC further disclaims all expressed, statutory or implied warranties applicable to Products and accessories which are not manufactured by it.

12. The buyer acknowledges that the Products may be dangerous to persons or property when not installed or used in strict compliance with the instructions for installation and use furnished by FAAC and with the safety requirements specified in the EN 12445 and EN 12453. FAAC expressly disclaims liability for any personal injury or property damage resulting from installation or use of the products, other than in strict compliance with FAAC's written instructions with respect to installation and use, or from installation or use of the products together with safety accessories or other products not manufactured by FAAC, it being understood that the maximum liability of FAAC to the Buyer or to any other person or entity arising out of or in connection with the product and based on a claim of breach or under the warranty, shall in no case exceed the price paid to FAAC for the Product which gives rise to the claim, loss or damage. In no event shall FAAC be liable for special and consequential damages including, without limitation, loss of profits.

13. FAAC shall not be held responsible to the buyer for any failure to perform, including late delivery or failure to deliver, which failure to perform is caused by occurrences beyond FAAC's reasonable control, or in any case caused by an event of force majeure, including, but not limited to, late delivery or non-delivery of materials by suppliers, strikes and other trade union actions, terrorist activities, suspension of electrical energy or difficulties in transportation.


14. The contracts of sale to which FAAC is a party shall be governed by the laws of Italy, excluding the Vienna Convention of 1980 relating to contracts for the international sale of goods. Any and all disputes arising out of or relating to the sale of Product by FAAC shall be resolved exclusively by the court of Bologna, Italy. Notwithstanding the foregoing, FAAC may bring an action against the buyer in any court having jurisdiction over the buyer.


Analytical index by code


104001 13	6100110 10	6100161 80	6100276 58
104002 13	6100111 43	6100190 43	6100277 61
424413 33	6100112 43	6100192 56	6100278 58
610006 43	6100113 43	6100193 56	6100279 58
737000 33	6100114 43	6100194 56	6100280 61
737001 33	6100115 43	6100197 56	6100281 62
6020028 84	6100120 49	6100200 56	6100282 62
6100011 87	6100121 49	6100201 56	6100283 62
6100012 85	6100122 49	6100220 45	6100285 43
6100013 37	6100123 49	6100221 23	6100286 29
6100014 41	6100124 73	6100227 56	6100294 61
6100015 41	6100125 43	6100228 23	6100295 61
6100042 80	6100126 59	6100229 84	6100296 61
6100043 17	6100127 41	6100230 84	6100297 61
6100052 10	6100140 45	6100236 69	6100298 61
6100054 12	6100144 17	6100237 85	6100299 61
6100059 43	6100145 23	6100238 85	6100300 61
6100060 43	6100146 10	6100247 45	6100302 61
6100061 43	6100147 10	6100253 17	6100304 10
6100075 84	6100148 12	6100254 10	6100306 45
6100097 83	6100149 23	6100260 58	6100315 81
6100099 86	6100150 23	6100263 27	6100316 81
6100105 43	6100156 43	6100264 41	6100317 29
6100106 43	6100157 80	6100273 45	6100318 29
6100107 43	6100158 80	6100274 45	6100319 27
6100109 49	6100159 80	6100275 45	6100320 27

6100321 27	6130028 57	6170135 12	58P0379 41
6100322 29	6130034 60	6170136 12	58P0380 41
6100323 85	6130035 60	6170150 24	58P0381 41
6100324 17	6130037 60	6170151 24	58P0386 41
6100325 62	6140003 44	6170152 50	58P0387 41
6100326 62	6140004 44	6170153 50	58P0392 41
6100327 62	6140005 44	6170178 20	58P0398 41
6100330 85	6140009 44	51700811. 12	58P0511 17
6100331 85	6140010 44	51700931. 11	58P0583 41
6100332 10	6170026 10	51701271. 10	58P0584 41
6100333 84	6170027 10	51701281. 10	58P0587 41
6100334 10	6170030 16	61100821. 13	58P0653 25
6100339 80	6170031 16	61100861. 13	58P0656 51
6110002 36	6170038 16	00058P0656 51	58P0658 51
6110022 36	6170039 16	58F1811 59	58P0659 51
6110080 34	6170077 28	58F1812 58	58P1573 29
6110084 34	6170080 28	58F1813 59	58P1800 58
6120024 48	6170082 26	58F1814 59	58P1802 58
6120034 48	6170116 11	58F1815 59	58P1803 59
6120036 40	6170117 20	58P0047 29	58P1804 59
6120041 42	6170118 20	58P0048 29	58P1805 59
6120042 42	6170120 20	58P0050 29	58P1808 58
6120045 40	6170121 20	58P0051 29	58P1810 58
6130021 54	6170122 20	58P0052 29	58P1817 59
6130026 57	6170124 18	58P0199 17	58P1818 59
6130027 57	6170126 18	58P0371 41	58P2015 41

58P2081	58
610025701-10	23
A10801	83
A13017	81
A13020	81
JA108.	83
JA146.	33
JA147.	33
JA148.	33
JA221.	33
JA222.	33
JA310.	17
JA31101	10
JA31101-15	17
JA320.	10
JA325.	17
JA326.	79
JA327.	79
JA328.	17
JA331.	79
JA335.	13
JA337.	84
JA339.	84
JA592.	10

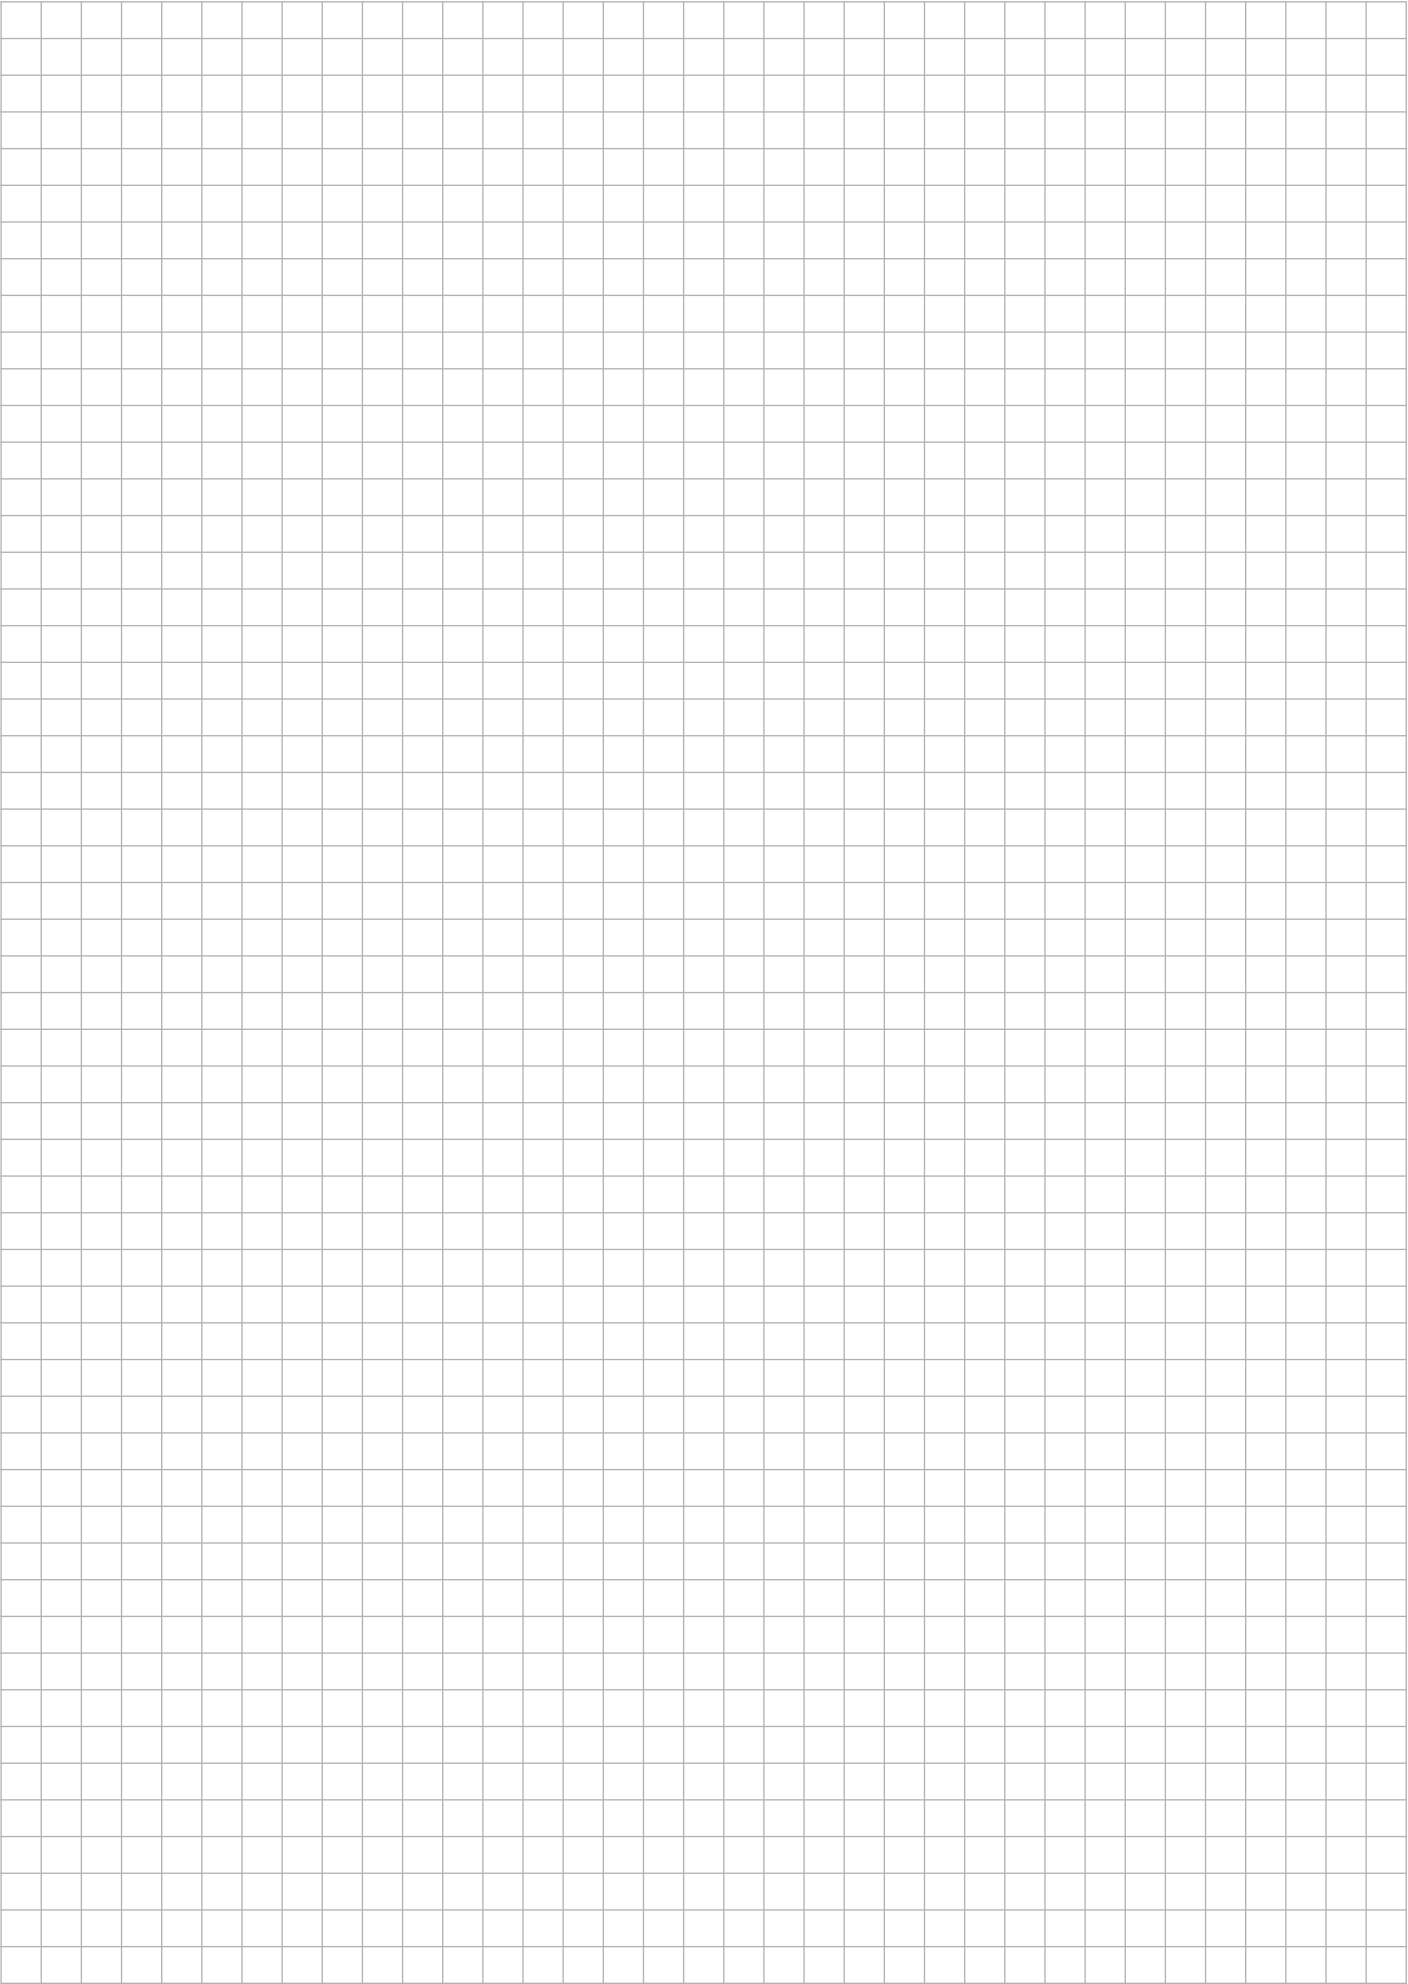

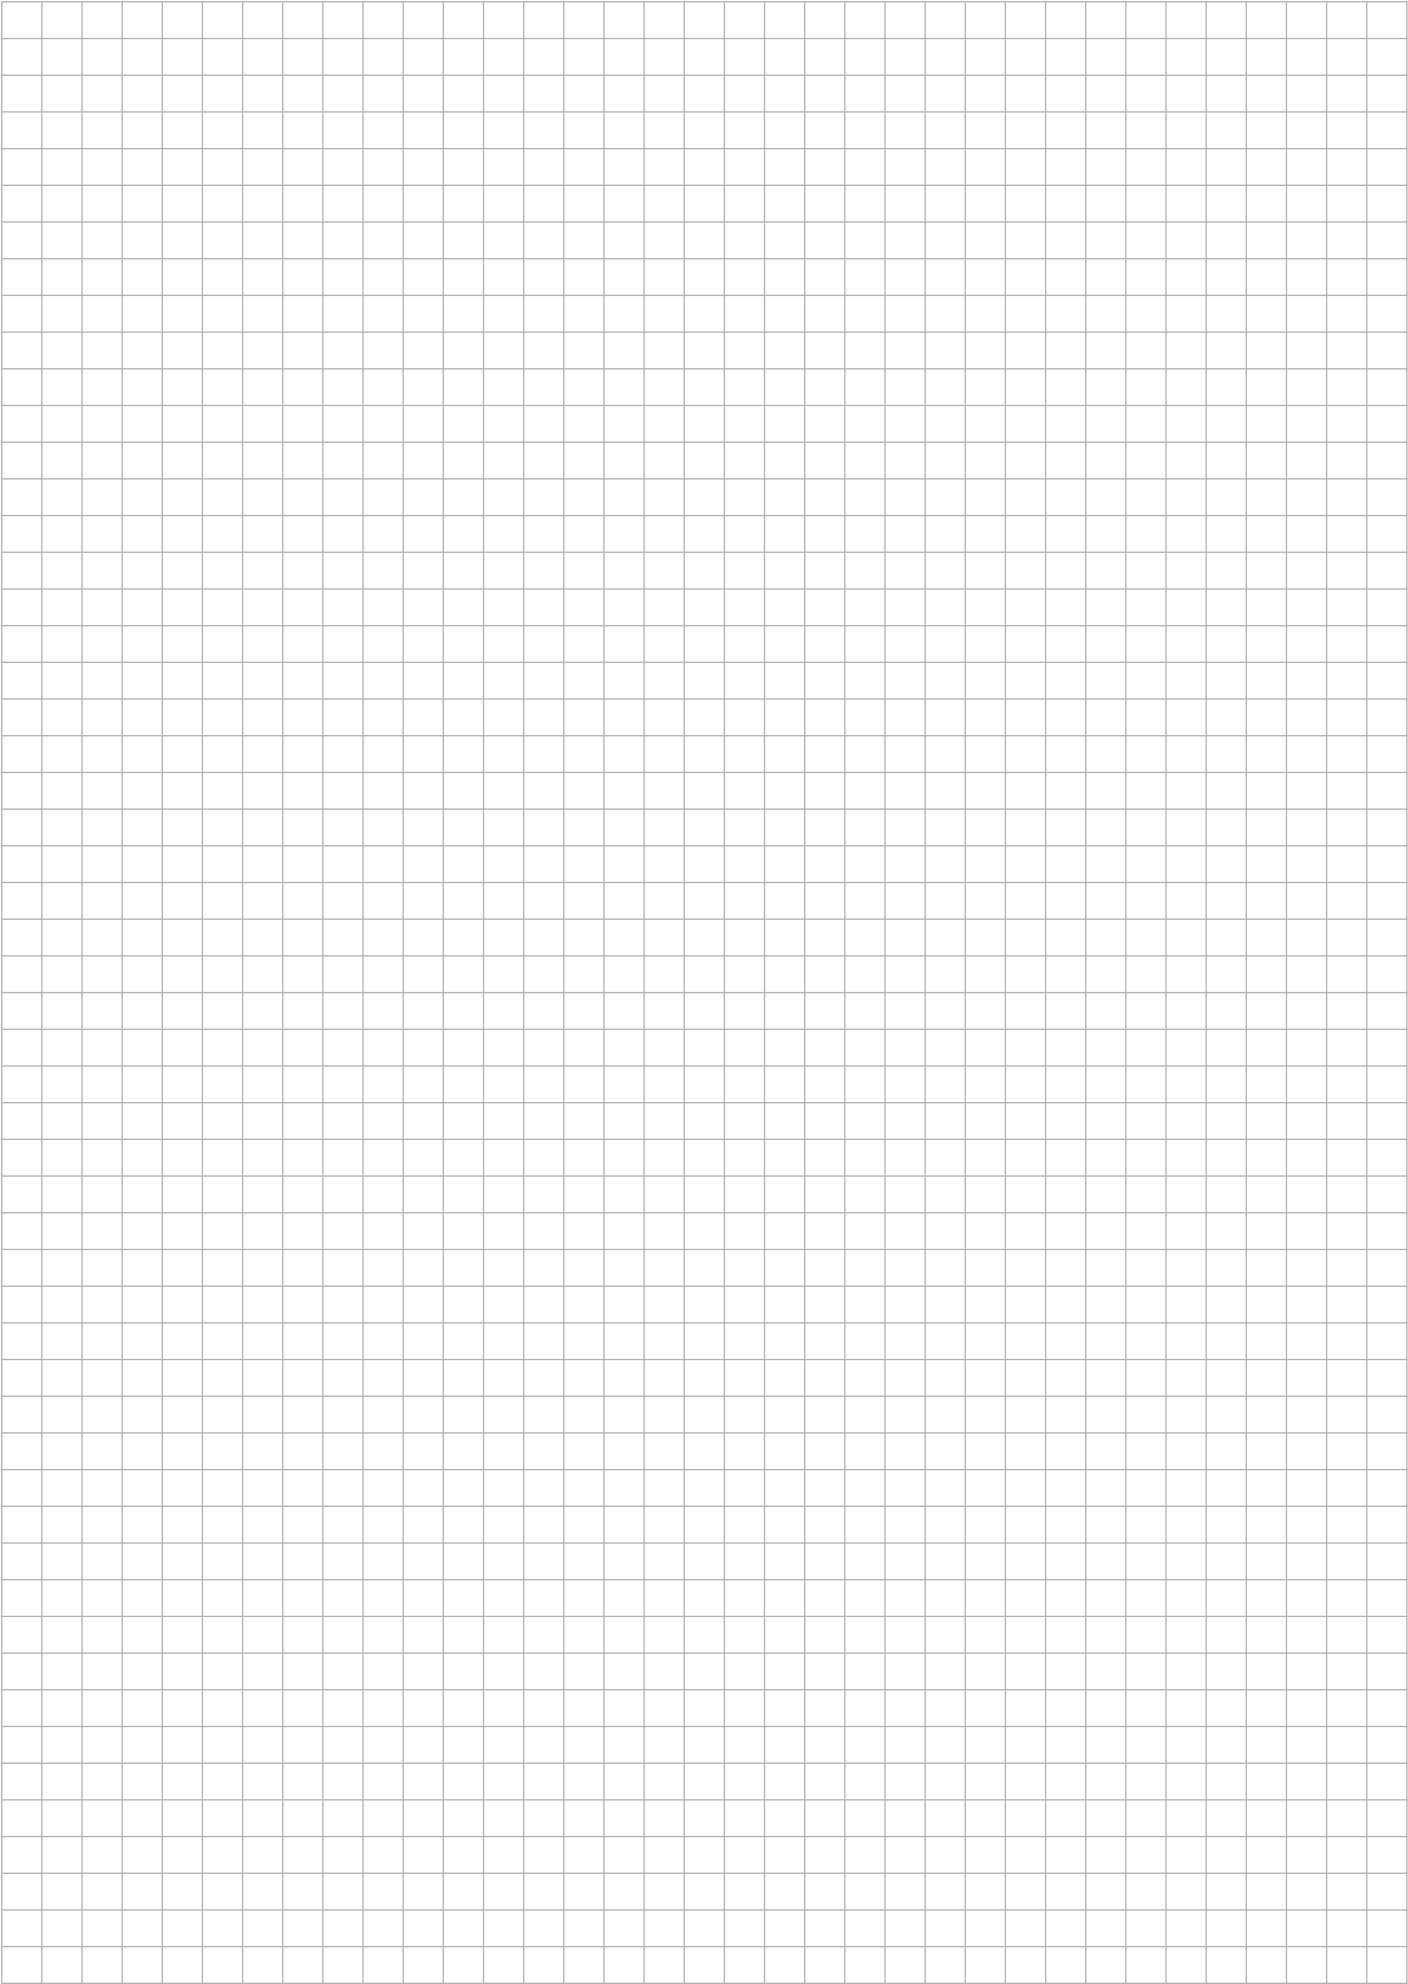

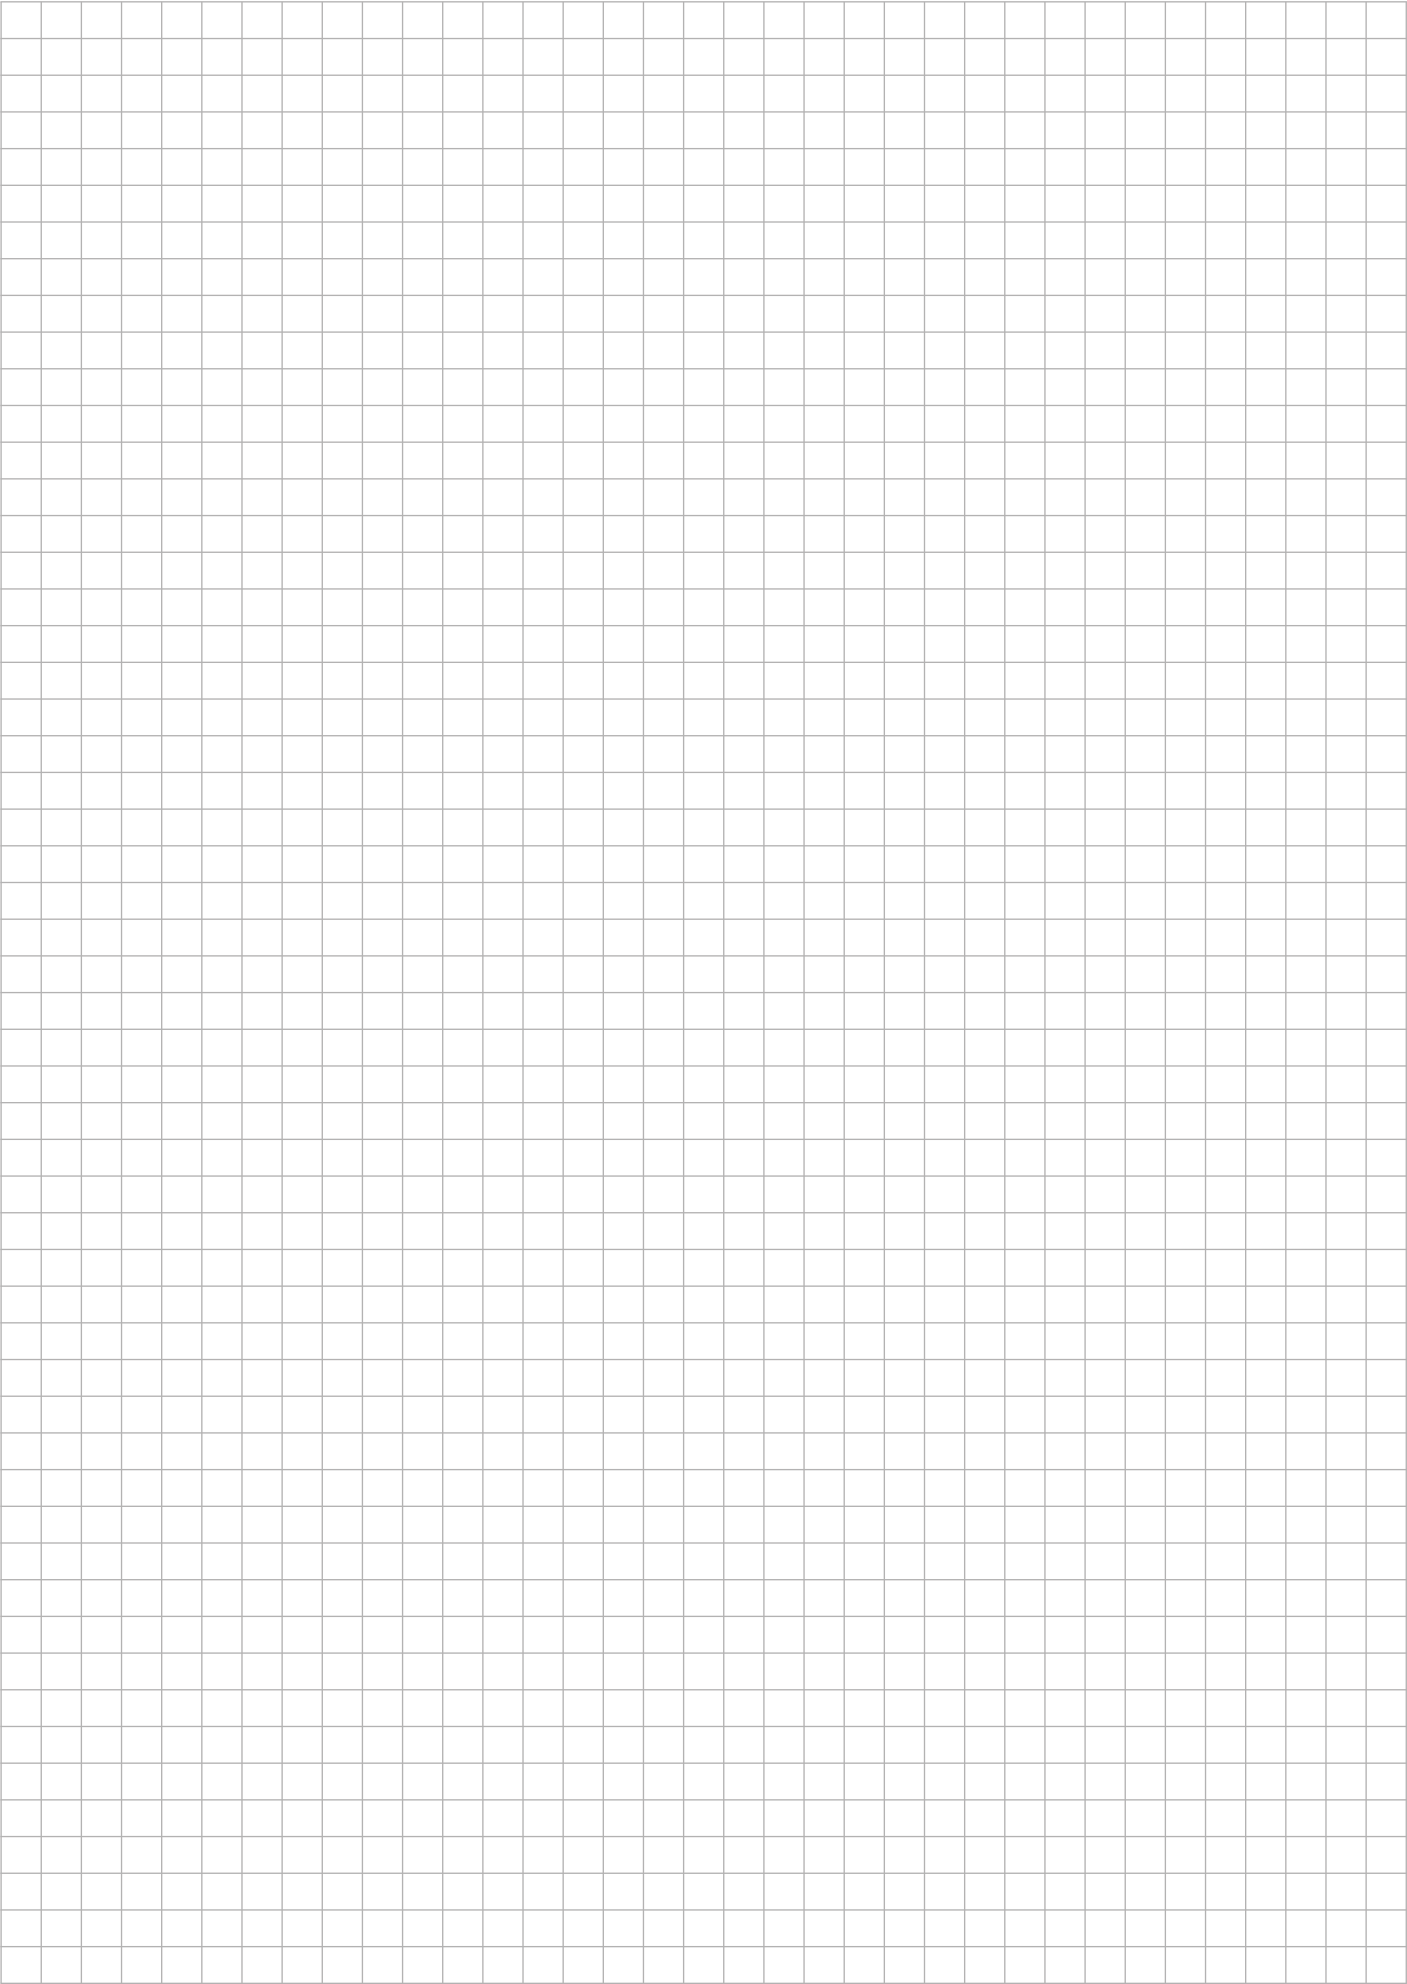



Automated systems for
SWING GATES




Automated systems for
SLIDING GATES



Automated systems for
GARAGE DOORS AND SHUTTERS



Automated systems for
INDUSTRIAL DOORS



AUTOMATIC BARRIERS